

FOR SALES AND SERVICE PLEASE CALL:

PTB SALES T :: 626.334.0500 service@ptbsales.com www.ptbsales.com

DATE SERVICED:

VIEW OUR INVENTORY

INSTRUCTION MANUAL

MULTI-STAGE DRY VACUUM PUMP

EV-S Series (for 400V)

EV-S20

EV-S50

EV-S100

EV-S200

/! CAUTION

Read and understand this INSTRUCTION MANUAL thoroughly before using this equipment.

Be sure to keep this INSTRUCTION MANUAL on hand for future reference.

To Facility and Tool Manufactures:

Be sure to distribute this Instruction Manual to all end-user personnel actually operating this equipment.

Date	Contents	
2009/5/27	Newly issued	
2009/11/17	Revised	

ISSUED BY PRECISION MACHINERY COMPANY



Foreword

Design of EBARA EV-S series DRY VACUUM PUMP is based on superior engineering and long experience. To prevent any possible trouble and provide satisfactory operation and long life, it is important to thoroughly understand this EBARA EV-S series DRY VACUUM PUMP by careful study of this manual. If any questions arise regarding this manual, please direct them to EBARA or your dealer. Your questions will be promptly answered and your suggestion may be considered for incorporation into our future products.

À

WARNING

Before using this equipment, read this INSTRUCTION MANUAL thoroughly. Manufactures warranty will be void, if the EV-S series DRY PUMP has been incorrectly installed, operated or maintained or if it has been modified or repaired with parts not specified by manufacture.

EBARA is not liable for any injury or damage arising from an individual's carelessness, or misuse.

(1) Limited Warranty

The terms of this Warranty limit the liability of EBARA CORPORATION. Read it carefully.

<Duration>

For new pumps, the Warranty period shall be one (1) year from the date of commencing operation by user or 18 months from shipment by EBARA, whichever comes first. This Warranty does not apply to service beyond these time periods.

For overhauled pumps, the warranty period shall be six (6) months from shipment by EBARA.

<Coverage>

For the duration of the Warranty period EBARA warrants this EV-S pump from failure due to defects in materials or workmanship. For such failures, EBARA will, at its option, either replace or repair the pump free of charge

Such repair or replacement will not extend the duration of the warranty beyond the original period.

For repairs not covered under this Warranty, EBARA will charge the customer for parts and labor.

<Exclusions and Limitations>

This Warranty does not cover the following:

- 1. Failure due to operating the pump in a manner or under conditions other than as described in the instruction manual.
- 2. Failure due to corrosion, byproducts or foreign material entering the pump.
- Failure due to fire, flood, earthquake, Acts or God, Acts of War or other circumstances beyond EBARA's control.

Disassembly or repair of the pump by parties other than EBARA or EBARA-authorized suppliers will void this Warranty.

EBARA's liability is limited to repair or replacement of the pump under Warranty. EBARA accepts no liability for consequential damages, including injury to personnel and damage to facilities, tools or product.

EBARA makes no Warranty of merchanability, beyond statuatory requirements or of fitness for a specific purpose.

(2) Repair and Servicing

Requests for repair or servicing of the pump shall be made to your dealer or to EBARA.

If the pump fails, please contact EBARA or an authorized Agent/Distributor and provide the information on the nameplate and details of the problem.

EBARA cannot accept responsibility for unauthorized returns.

If you have any other inquiries about the pump, please contact EBARA.



(3) EV-S Pump Applications

- Intended application for EV-S Series dry pumps is supporting semiconductor or LCD
 manufacturing tools--pumping either load locks or light duty processes, i.e. gas mixtures that do
 not generate byproducts that might deposit in the pump.
- When purchasing this pump for any other purpose except the above, contact EBARA beforehand.
- After purchase, before changing a pump application to a purpose other than as described above, check with EBARA.

(4) Safety Notice

It is essential that those operating this pump should have the knowledge to identify and avoid hazardous conditions associated with the pump. Inadequate or rash operation may cause dangerous and serious accidents. Before installation and operation, the operator should first have a good knowledge of the pump construction, operation procedure, and its hazards. The operator should read through this instruction manual and other documents issued by EBARA in detail.

The following symbols are used to highlight important information and instructions that must be followed to prevent personal injury or damage to equipment. Please study the symbols carefully so that the meaning of any warning you encounter is immediately clear.

DANGER: indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

WARNING: indicates a potentially hazardous situation which, if not avoided, could result in death or serious situation.

CAUTION: indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury or possible damage to the equipment or machine.

Note : is used to call attention or to emphasize essential information.

Precautions necessary for safe use of the EBARA EV-S series DRY VACUUM PUMP are detailed in this instruction manual, while important items concerning precautions for handling EBARA EV-S series DRY VACUUM PUMPare listed below.

∕!\ DANGER

- Be sure to keep the power supply to the pump turned off and lock-outed until you have finished the wiring and connecting work.
- · Keep out from under the pump when lifted



<u>/i\</u>

/!\ WARNING

- For lifting the pump, use only qualified operator personnel. Be sure that the wire rope and crane used for lifting the pump are in proper order and match the weight of the pump. To prevent unequal weight distribution, suspend the pump by ensuring that the slinging angle remains symmetrically centered.
- Be careful not to overturn the pump when pushing and pulling it sideways, because the width of the pump is small to its height.
- Be sure to check for leaks after you have installed the pump. Leaks will cause serious danger due to the discharge of harmful and hazardous substances and the occurrence of unpredictable reactions associated with the admission of air into the pump.
- The pump casing, inlet piping and exhaust piping become extremely hot during operation and for some time after stopping. Be sure that pump and exhaust piping do not come in contact with humans or inflammable substances. Do not remove the pump cover during operation.
- · Electrical wireing shall be carried out only by qualified electricians.
- · Be sure to connect the grounding wire.
- The pump and exhaust piping will remain at a high temperature during operation and for a short time after the pump has stopped. Be sure to avoid contact and keep inflammable substances out of reach. Do not remove the outer cover during operation.
- Maintenance on the vacuum and exhaust piping shall be performed by taking proper action to avoid the dispersion of inflammable, toxic and/or hazardous substances and to prevent physical contact with, and absorption of, these substances.
- ELB (or CB) is not installed in the pump unit. Please install ELB(or CB) based on the law and the standard in the installation region.
- Do not perform a withstand voltage test. Failure to comply could result in damage to the sensitive devices.
- Be sure to purge with N2 gas in order to prevent corrosion and reduce the formation / deposition of reaction by-products in the pump. When inflammable and/or toxic gases are diluted with N2 to the safe concentration, be sure to maintain a separate supply of N2 gas to the pump exhaust pipe.
- · When the pump has been used for exhausting highly toxic gases such as arsenic and mercury compounds, be sure to contact EBARA Corporation before you return the pump.
- Follow the procedures in Section 2.4, Utility Disconnection, before disconnecting any lines or cables attached to the pump or performing any maintenance or repair operations.



CAUTION

- The neck portion of the casters will vibrate during caster movement. Be sure to keep your fingers and feet out.
- · Do not step on the pump or place objects on it.
- The exhaust piping made by polyvinyl chloride causes the noise thrugh the pipe.
- · Even when the cooling water flow rate drops, the pump will continue to operate until the pump part reach a temperature corresponding to the safety limit. The material selected for the water piping of facility side should have a heat resistance so that it can withstand a maximum temperature of at least 70°C at the operating pressure.
- · When the cooling water supply is left on while the pump is stationary dew condensation will form on the water-cooled parts in locations with high humidity. Make it a rule therefore to stop the cooling water when water droplets can be detected on the outer surface of the pump cooling water piping as this suggests the possibility of dew condensation in the pump.
- · Do not apply the power supply from the pump's power pack to any other equipment as this will result in malfunctioning of the control units and in pump failure.
- · Use the correct wiring materials and size to match the operating conditions in accordance with the power consumption rating and ambient air temperature of the pump.
- · Without sufficient cooling water, the pump temperature will rise and problems such as rotor contact will occur.
- · Abrupt rotation of the pressure adjustment knob will cause the pressure indicator needle of the regulator to wobble and result in an inaccurate pressure display.
- · Unless a sufficient supply of N2 gas is maintained, serious problems will occur such as pump corrosion and accretion of reaction by-products.
- · When the production process leads to react by-products in the pump or when the process handles corrosive gases, be sure not to stop the pump until after at least 30 minutes of stopping the process gases.
- · Process gases will remain in the vacuum pipes and the pump even after the pump has been stopped. Be sure therefore to purge for at least 1 hour after the pumps has been stopped. Do not discontinue the N2 purge when the pump is stopped only for a short
- The pump will remain at a very high temperature event after it has been stopped. Be sure therefore to leave the cooling water on for about 1 hour after the pump has been stopped.
- · Do not exhaust the process gases until at least 30 minutes after the pump has been started. The pump casing temperature will stabilize after about 2 hours and it is recommended not to start exhausting the process gases earlier than this.
- Do not suddenly make a pump inlet port the pressure that is higherr than atmospheric pressure.



Note

- Pump must be placed in an upright position. Do not stack as packing. When the pump was overturned, lubricating oil may leak to the pump side.
- · Install pump in a location at an ambient not exceeding 30°C. Particular caution is required when the pump is operated in an enclosed room.
- · If the pump is not leveled, shortage of the lubrication oil supply to the bearing may be caused.
- · Floor vibrations will increase unless the adjustment feet are used.
- When several pumps are used, be sure to connect the cooling water pipes to each pump in parallel. The cooling water will flow more or less easily according to the type of pump and the piping. Be sure to select the correct piping so as to ensure the appropriate cooling water flow rate for all pipes used.
- When the cooling water connections are incorrect and the flow is reversed, a flow rate different from the normal value will be displayed. Nor will the pump will not be cooled properly. This will result in accident. Be sure therefore to connect correctly to avoid problems.
- · Do not wire vacant pins.
- · Apply a 12V DC power for input signals on the pump side. Do not apply this voltage on the equipment side. The output signals are generated from an open collector output. Please use it by the equipment side, impressing the power supply of DC4V to DC27V.
- · Be sure to wire all signals with the correct polarity (SIG./COM.).
- When output signals are used to energize an inductive load such as a relay, be sure to insert a diode (100V. 1A class) in order to absorb the back electromotive force due to surge currents.
- · Do not use the power supply for other purposes.
- · The pump unit itself has no cooling water flow adjustment valve.
- · For normal operation, open the N2 gas selector valve. To save N2 gas set close the valve when the production process does not lead to the formation of reaction by-products in the pump or when the process uses non-corrosive gases.
- · It takes 10 odd seconds until the flow has stabilized after you have operated the N2 gas selector valve.
- The pump cannot start while the measuring instruments are warming up for 10 seconds after turn on the power supply.
- The pump will not start when an WARNING/ALARM has been generated. When the START button is pressed, "STARTFAIL" will appear on the display.



(5) Safety Warning Labels

Following safety labels are attached to pump covers.

- 1. High temperature warning
- 2. Hazardous voltage warning
- 3. Hazardous materials warning
- 4. Electric charge mark
- 5. Hazardous weight ganger

1. High temperature warning

Hot surface may burn or cause injury.

Allow the piping and casing to cool before servicing.



2. Hazardous voltage warning

Hazardous voltage may shock, burn, or cause death.

Turn power off and lockout before servicing.





3. Hazardous materials warning

In case of hazardous materials are handled. Run the pump only with N2 gas purge before servicing. Take adequate measures against dangerous reaction and contact with human body.



4. Electric charge mark




5. Hazardous weight danger

Heavy weight may cause severe injury or death due to overturningor falling pump. Keep out from under the lifted pump.


Raise all adjuster-feet fully when moving.





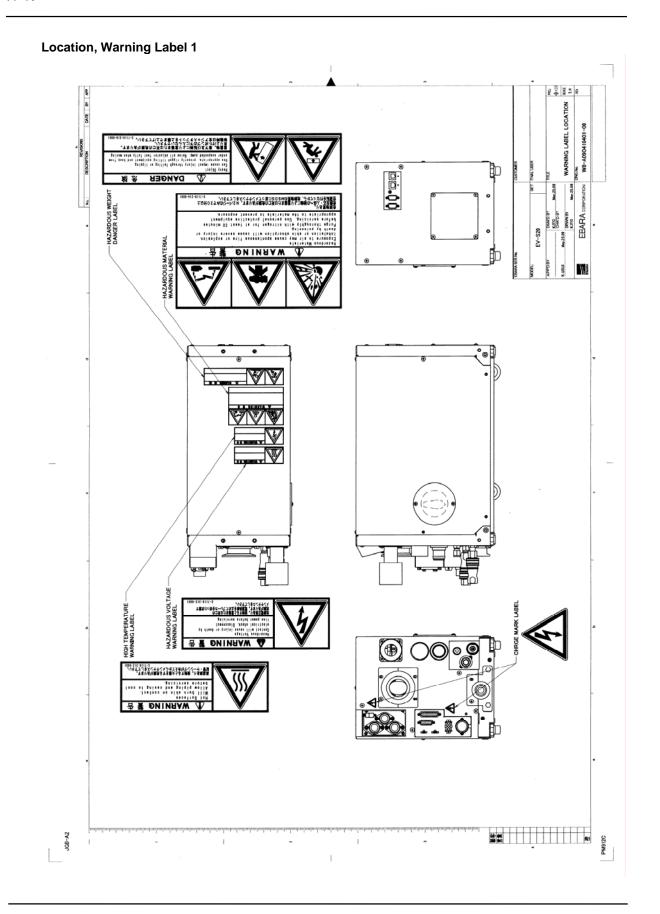



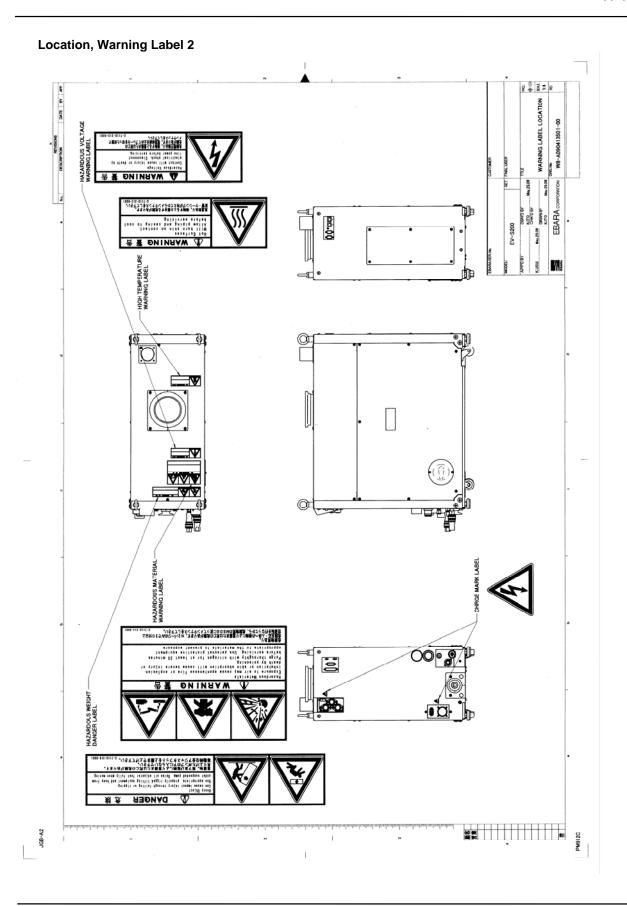




Interlock Schematic (EV-S20) CPU [DVP401] LCD controller RS485 com m unication CNJ) [NTERLOCK BOARD] (EXT.L) CN_11) 1 ⁺12√ [DVP414] Userside Pump side POWER SUPPLY 3 \$ 3W 380-440VAC 50/60Hz CPU [MPMOTORDRIVER] NO IZE FILTER



Interlock Schematic (EV-S50 / EV-S100 / EV-S200)

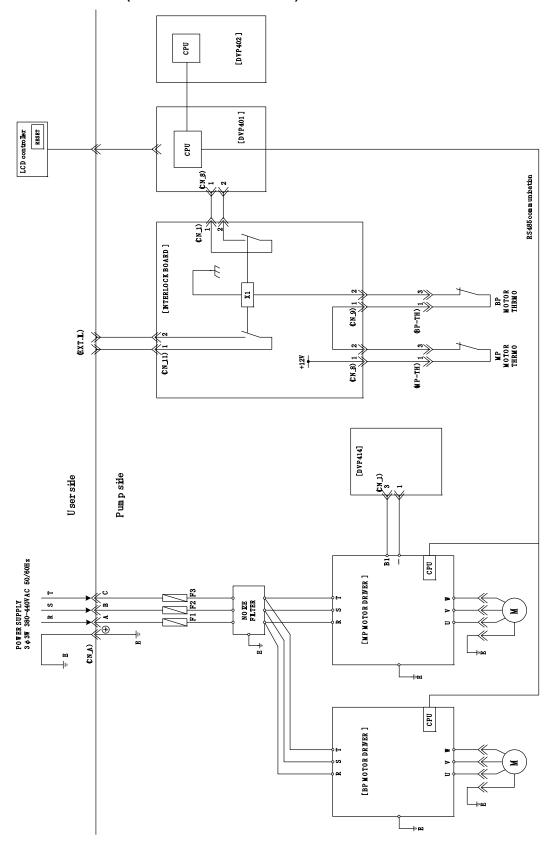

(6) Contents

Foreword		2
(1) Limit	ed Warranty	3
(2) Repa	ir and Servicing	3
(3) EV-5	S Pump Applications	4
(4) Safet	ty Notice	4
(5) Safet	ty Warning Labels	8
1. Accepta	nce Check	17
2. Product	Description	18
2.1 Outli	ne	18
2.1.1	Pump Module	18
2.1.2	N2 Gas (EV-S**P / EV-S**N)	18
2.1.3	Cooling Water	18
2.1.4	Exhaust	18
2.2 Co	ntrol System	19
2.2.1	Warning	19
2.2.2	Operation Status Control	19
2.3 De	tailed Specifications	20
2.3.1	Model Description	20
2.3.2	Specifications	21
2.3.3	Outline Drawing	25
2.3.4	Performance Curve	33
2.3.5	System Flow	35
2.4 Re	lease and shut off residual internal energy	36
2.4.1	Electrical Power - Lockout and Tagout	36
2.4.2	Cooling water	36
2.4.3	Nitrogen (N ₂)	37
2.4.4	Returning to Service	37
3. Installation	on	38
3.1 Mo	vement and Fixation	38
3.1.1	Location	38
3.1.2	Caster and adjustment foot	39
3.1.3	Pump Fixation (Option)	40
	g	
3.2.1	Vacuum and Exhaust Piping	45
3.2.2	Cooling Water Piping	46
3 2 3	N2 Gas Pining	47



	3.3 Electrical Wiring	48
	3.3.1 Power Supply Wiring	48
	3.3.2 Control Signal Wiring	50
	3.3.3 External Interlock Connector (EXT I/L)	54
4.	Power Supply for the Options (Connector CN-C)	54
5.	LCD Controller	55
	5.1 LCD Outline	55
	5.2 LCD Indication	56
	5.3 Setting the operational mode	60
	5.3.1 Setting the pump operation control mode	62
	5.3.2 Setting the DIP switch	62
	5.3.3 Setting the pump running mode	63
	5.3.4 Setting the rotational speed in the NORMAL mode	63
	5.3.5 Setting the rotational speed in the S. ENERGY mode	64
	5.3.6 Setting the pump N2 flow low warning threshold	64
	5.3.7 Setting the Water flow low warning threshold	65
	5.3.7 Setting the Back Pressure high warning threshold	65
	5.4 Dip Switch	66
	5.5 DIP Switch setting display	68
6.	Operation	70
	6.1 Before Starting	70
	6.2 START/STOP	73
	6.2.1 LOCAL (Pump Side) Start/Stop	74
	6.2.2 REMOTE Start/Stop	74
	6.2.3 COM Start/Stop	75
	6.3 Operation when momentarily power failure happens	75
7.	Maintenance and Inspection	76
	7.1 Routine Inspection	76
	7.2 Vacuum and Exhaust Piping	77
	7.3 Lubricating Oil	78
	7.4 Spare (Maintenance) Parts List	81
	7.5 Overhaul	82
8.	Disconnection and Transportation	83
9.	For SEMI S2 standard	85
10	. Troubleshooting	86
	10.1 Troubleshooting (1) Basic trouble	87
	10.2 Troubleshooting (2) WARNING	88



	10.3	Froubleshooting (3) ALARM	89
	10.4	Froubleshooting (4) Option	90
11.	Inqui	ies	91
	11.1	North America	91
	11.2	Asia	92
	11.3	FUROPE	93

APPENDIX

- 1. Material Safety Data Sheet (Lubricant oil)
- 2. Material Safety Data Sheet (Lithium battery)
- 3. Overhaul request form
- 4. Overhaul request form (USA)
- 5. Typical Hazardous gas information
- 6. Leak check procedures



1. Acceptance Check

Check the following items on receipt of the pump package.

- (1) Check that the nameplate affixed to the outer cover of the pump to confirm that the pump supplied agrees with your order. Check the accessories against the packing list and the previously submitted drawings and documents to confirm that the all ordered accessories have been supplied.
- (2) Check that no damage for the pump has occurred in transit.
- (3) Store the pump in a dry and clean place if it is not installed at once after delivery.

Temperature : 5-40°C Humidity : 80% or less

Note

Notify EBARA without delay when damage is discovered or when components are missing. Do not use when a leak is present as this will result in accident.

Note

Pump must be placed in an upright position. Do not stack as packing. When the pump was overturned, lubricating oil may leak to the pump side.



2. Product Description

2.1 Outline

The EV-S Series dry vacuum pump has a compact design and includes various sensors and controls to enhance reliability and operation.

2.1.1 Pump Module

The pump is a Roots type vacuum pump which rotates a pair of non-contact multi-stage rotors synchronized by timing gears. In the unit, a Booster Pump (BP) and the Main Pump (MP) are connected in series for ventilation.

The timing gears and bearings are enclosed in a compartment that is independent of the casing. For lubrication Perfluoro-Polyether (PFPE) oil and grease are used.

The pumps of this series are filled with lubrication oil at the factory. Use only the recommended lubrication oil grades shown in specification Table 3.1 for replenishing or replacing.

2.1.2 N2 Gas (EV-S**P / EV-S**N)

Introduce nitrogen gas to dilute the hazardous gases to an unharmful level. Properly connect the nitrogen gas line to the purge port provided according to the instructions in Table 3.1 and the descriptions in Section 4.2.3. In the cases the gas concentration may become higher than the specified for safe gas exhaust, introduce the nitrogen gas to lines to the exhaust outlet. The tool user shall provide the purge port for this purpose.

N2 gas is also required to supply to seal the shaft section. This protects the penetration to bearing section, such as corrosive gas. To reduce pump corrosion due to process gas or accumulation of reaction by-products, N2 gas is supplied to each pump component as dilution purge gas. Stopping the dilution N2 with a selector valve can save N2 gas, when process does not produce corrosion and reaction by-products. The correct amount of N2 gas is supplied for those two types of purge operation, by adjusting the regulation pressure to the specified value. The nitrogen gas selector is locating on the right side of the unit, facing the utility connectors. It is under the outer cover.

2.1.3 Cooling Water

Because the pump compresses gas from a vacuum to atmospheric pressure, compression heat is generated. Therefore cool the pump with cooling water.

The cooling water connector takes the form of a coupler for easy connection and disconnection.

2.1.4 Exhaust

A check valve is built into the pump unit to prevent reverse flow of gas from the exhaust through the pump to the vacuum chamber when pump is stopped.



2.2 Control System

EV-S Series dry vacuum pumps have a built-in measuring unit consisting of a Main Fuse, Noise Filter (NF) and control source. To improve reliability and safety, the condition of each utility and pump section is monitored by a sensor. During pump operation all operating conditions are monitored, including power supply, cooling water flow, N2 gas flow, casing and motor coil temperature, motor speed, and electric power for motor. Continuous operation is possible when there is a momentarily power failure (170V or less) of 1 sec or less.

2.2.1 Warning

To assure the reliability of the pump as a vacuum exhaust system, the pump protection system generates two levels of alarm : WARNING and ALARM.

A WARNING signal is generated when pump operation exceeds the normal range. It therefore only draws attention that the normal operating values are not adhered to but does not signify that danger is imminent. The pump will continue to operate in this condition.

An ALARM signal output is generated and the pump will stop automatically when the upper mechanical safety limit is reached during pump operation.

When an ALARM output is suddenly generated, while the plant unit is operational, a WARNING signal will be generated to ensure that the plant operation is not discontinued. This enables the operator to check the pump after the equivalent of one cycle has been completed.

Be sure to contact EBARA Corporation for details on checking the WARNING and ALARM setting conditions.

2.2.2 Operation Status Control

The sensor data are displayed on the LCD provided on the controller to facilitate operation status control and daily inspection.


All WARNING and ALARM signals are displayed on the LCD. For remote operation and monitoring, the signals are available as individual and group outputs.



2.3 Detailed Specifications

The following tables and figures should be consulted for pump specification, dimension and performance details.

2.3.1 Model Description

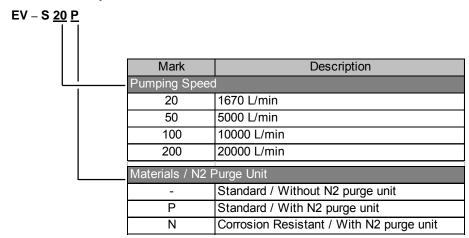

2.3.2 Specifications

Table 2.1 Specification (EV-S20 / EV-S20P / EV-S20N)

Model Model			EV-S20	EV-S20P / EV-S20N)	EV-S20N
Pumping Speed		LV-320	1670 EV-320N		
Ultimate Pressure		3.0 Pa	5.0 Pa		
Gas Inlet		0.01 a	NW50		
Co	nnection	Gas Outlet	NW25		
Apr	rox. Powe	er at Ultimate Pressure	0.4 kW		
"		lax. Power)	(2.2 kW)		
		Connection	Rc1/4 (Coupler)		
	Cooling	Pressure	Diffe	Differential Press.: Min. 0.2 MPa	
	Water	[Gauge Press.]		Supply: Max. 0.4 MPa	1
	vvatci	Flow Rate		1.5∼3.0 L/min	
		Temperature		Max. 30°C	
		Connection	1	1/4" Tube Fitting (Sa	ame as SWAGELOK)
Utility	N2	Pressure		Supply: 0.15 - 0.7 MPa	
ΞΞ	Gas	[Gauge Press.]	_	[Setting: 0.09 - 0.12 MPa]	
	Oas .	Approx. Flow Rate		17∼20 Pa m³/s	
		[N2-0 Mode]	[2.4 Pa m ³ /s]		a m ³ /s]
	Duet	Connection	1	ϕ 50 mm	
	Duct Venti- lation	Pressure	_	-196 Pa	
		Approx. Flow		0.5 n	n ³ /min
		rate		0.5 111 /111111	
Lub	rication	Brand	BARRIERTA J100ES (NOK)		
	Oil	Quantity	0.05 L		
	Ар	orox. Weight		60 kg	
		Phase/Volt/Freq.	3 Phase,	$380-440V \pm 10\% (50/6)$	60Hz±5%)
_	Power	Power Capacity		3.2 kVA	
S	upply	Connection	Amphenol		
			C016 20C003 100 12		
Control Signal		D-sub 15pin + D-sub 25pin			
Communication		RS-232C D-sub 9pin X 2			
Main Fuse		15A			
SCCR		10 kA			



Table 2.2 Specification (EV-S50 / EV-S50P / EV-S50N)

	Table 2.2 Specification (EV-S507 EV-S50P / EV-S50N)						
Model		EV-S50	EV-S50P	EV-S50N			
Pumping Speed		5000					
Ultimate Pressure		0.5 Pa					
Cc	nnection	Gas Inlet	NW50				
		Gas Outlet		NW25			
App		er at Ultimate Pressure		0.55 kW			
	(M	ax. Power)	(3.6 kW)				
		Connection	Rc1/4 (Coupler)				
	Cooling	Pressure	Diffe	Differential Press.: Min. 0.2 MPa			
	Water	[Gauge Press.]		Supply: Max. 0.4 MPa			
	· · · · · ·	Flow Rate		2.0~3.0 L/min			
		Temperature		Max. 30°C			
		Connection	1	1/4" Tube Fitting (Sa	me as SWAGELOK)		
Utility	NO	Pressure	_	Supply: 0.1	5 - 0.7 MPa		
Üŧ	N2 Gas	[Gauge Press.]			ting: 0.09 - 0.12 MPa]		
		Approx. Flow Rate		17∼20 Pa m³/s			
		[N2-0 Mode]	[2.4 Pa m ³ /s]		a m³/s]		
	Duct Venti- lation	Connection	_	φ 50 mm			
		Pressure	_	-196	S Pa		
		Approx. Flow		0.5 m	³ /min		
		rate	_	0.5 111 /111111			
Lub	rication	Brand	BARRIERTA J100ES (NOK)				
	Oil	Quantity	0.1 L				
	App	orox. Weight	100 kg				
		Phase/Volt/Freq.	3 Phase,	$380-440V \pm 10\% (50/60)$	OHz±5%)		
	ower	Power Capacity		4.8 kVA			
S	upply	Connection	Japan Aviation Electronics Industry				
		Connection	JL04HV-2E22-22PE-B				
Control Signal		D-sub 15pin + D-sub 25pin					
Communication		RS-232C D-sub 9pin X 2					
	Main Fuse		20A				
SCCR		SCCR	10 kA				

Table 2.3 Specification (EV-S100 / EV-S100P / EV-S100N)


	Table 2.3 Specification (EV-S100 / EV-S100P / EV-S100N)					
Model		Model	EV-S100	EV-S100P	EV-S100N	
Pumping Speed		mping Speed	10000			
Ultimate Pressure		nate Pressure	0.5 Pa			
Con	nection	Gas Inlet		NW80		
		Gas Outlet	NW40			
App		er at Ultimate Pressure	0.65 kW			
	(N	lax. Power)	(4.6 kW)			
		Connection	Rc1/4 (Coupler)			
	Coolin	Pressure		rential Press.: Min. 0.2	MPa	
	g	[Gauge Press.]		Supply: Max. 0.4 MPa		
	Water	Flow Rate		2.0~3.0 L/min		
		Temperature		Max. 30°C		
		Connection	_	1/4" Tube Fitting (Sar	ne as SWAGELOK)	
Utility	NO	Pressure		Supply: 0.15	5 - 0.7 MPa	
Ç	N2 Gas	[Gauge Press.]	_	[Setting: 0.09	- 0.12 MPa]	
		Approx. Flow Rate		17∼20 F	Pa m³/s	
		[N2-0 Mode]	_	[2.4 Pa	m ³ /s]	
	Duct Venti- lation	Connection	_	φ 50 mm		
		Pressure	=	-196	Pa	
		Approx. Flow		0.5 m ³	min	
		rate	_	0.5 111	7111111	
Lub	rication	Brand	BARRIERTA J100ES (NOK)			
	Oil	Quantity	0.1 L			
	Ар	prox. Weight		120 kg		
		Phase/Volt/Freq.	3 Phase,	$380-440V \pm 10\% (50/60)$	Hz±5%)	
F	Power	Power Capacity	6.4 kVA			
S	upply	Connection	Japan Aviation Electronics Industry			
		Connection	JL04HV-2E22-22PE-B			
Control Signal		ontrol Signal	D-sub 15pin + D-sub 25pin			
	Communication		RS-232C D-sub 9pin X 2			
	Main Fuse		20A			
SCCR		SCCR	10 kA			

Table 2.4 Specification (EV-S200 / EV-S200P / EV-S200N)


	Table 2.4 Specification (EV-S200 / EV-S200P / EV-S200N)					
Model		EV-S200	EV-S200P	EV-S200N		
Pumping Speed		20000				
Ultimate Pressure		0.5 Pa				
Cor	nnection	Gas Inlet	NW100			
		Gas Outlet		NW40		
App		er at Ultimate Pressure		0.75 kW		
	(N	lax. Power)	(5.1 kW)			
		Connection	Rc1/4 (Coupler)			
	Cooling	Pressure	Differential Press.: Min. 0.2 MPa			
	Water	[Gauge Press.]		Supply: Max. 0.4 MPa		
	vvator	Flow Rate		2.0~3.0 L/min		
		Temperature		Max. 30°C		
_	N2 Gas	Connection	_	1/4" Tube Fitting (Same as SWAGELOK)		
Utility		Pressure [Gauge Press.]	_	Supply: 0.15 - 0.7 MPa [Setting: 0.09 - 0.12 MPa]		
		Approx. Flow Rate [N2-0 Mode]	_		Pa m³/s a m³/s]	
	Duct Venti- lation	Connection	_	φ 50 mm		
		Pressure	_	-196	6 Pa	
		Approx. Flow rate	-	0.5 m	n ³ /min	
Lub	rication	Brand	BARRIERTA J100ES (NOK)			
	Oil	Quantity	0.15 L			
	Ар	prox. Weight		170 kg		
		Phase/Volt/Freq.	3 Phase, 3	380-440V±10% (50/6	0Hz±5%)	
F	Power	Power Capacity		6.8 kVA		
S	upply	Connection	Japan Aviation Electronics Industry			
		Connection	JL04HV-2E22-22PE-B			
Control Signal		D-sub 15pin + D-sub 25pin				
Communication		RS-232C D-sub 9pin X 2				
Main Fuse		20A				
SCCR		10 kA				




2.3.3 Outline Drawing

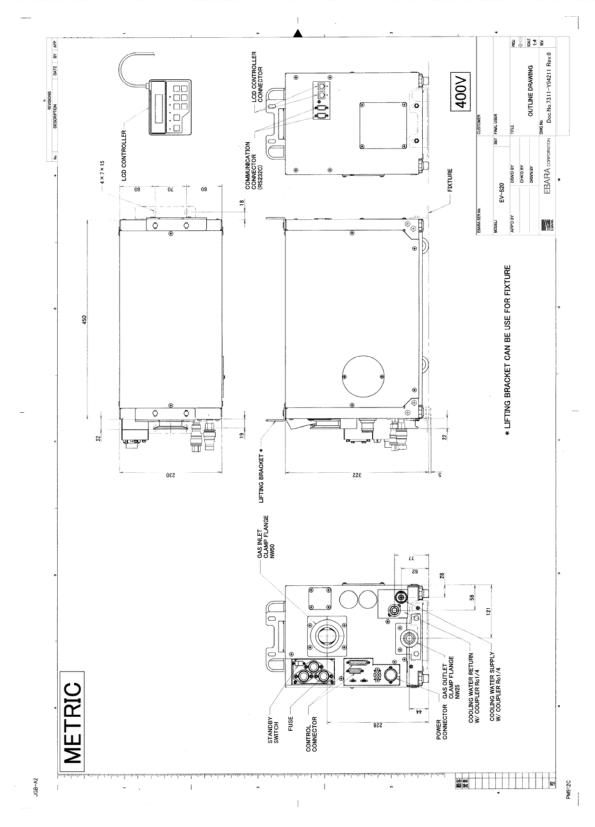




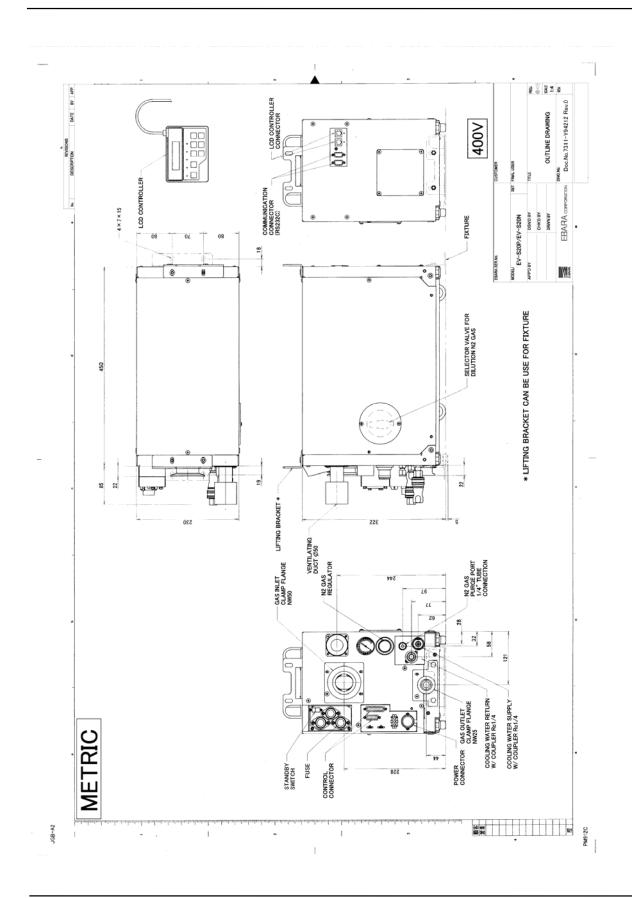




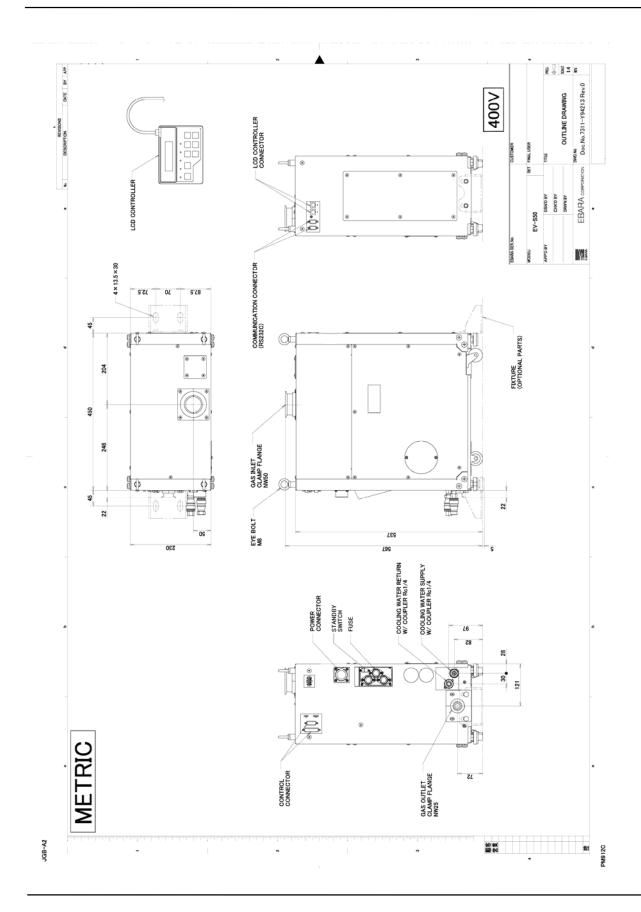




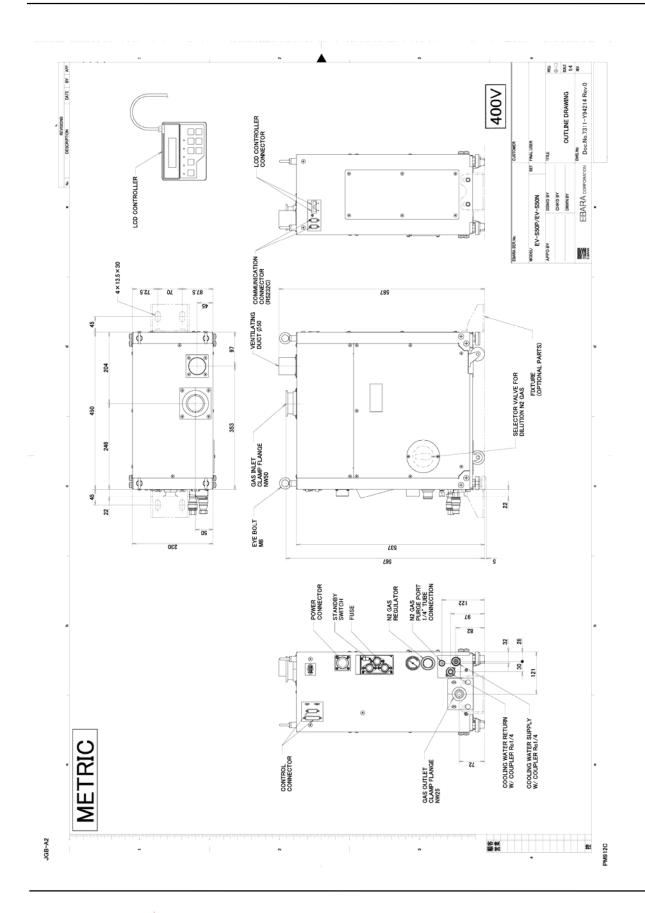




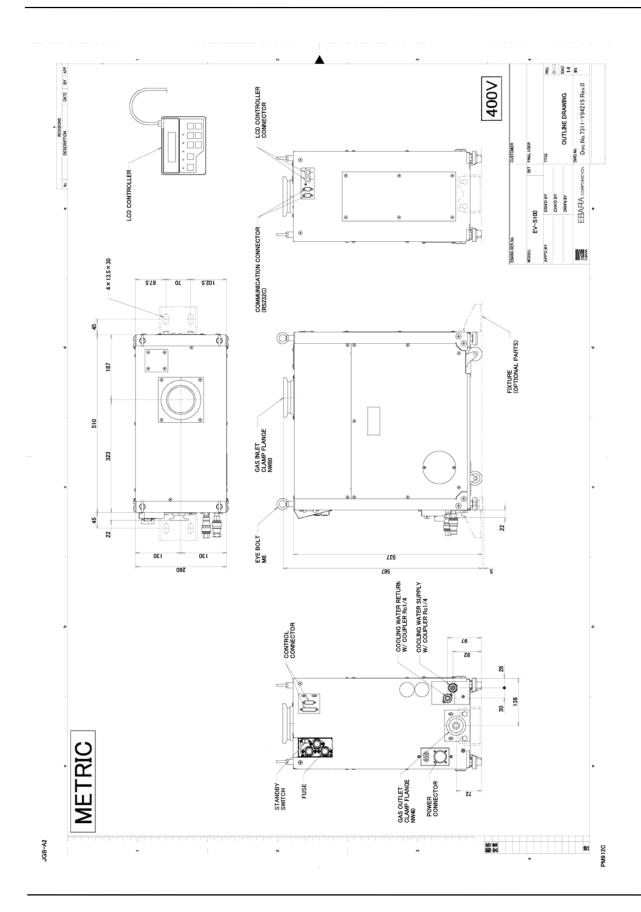




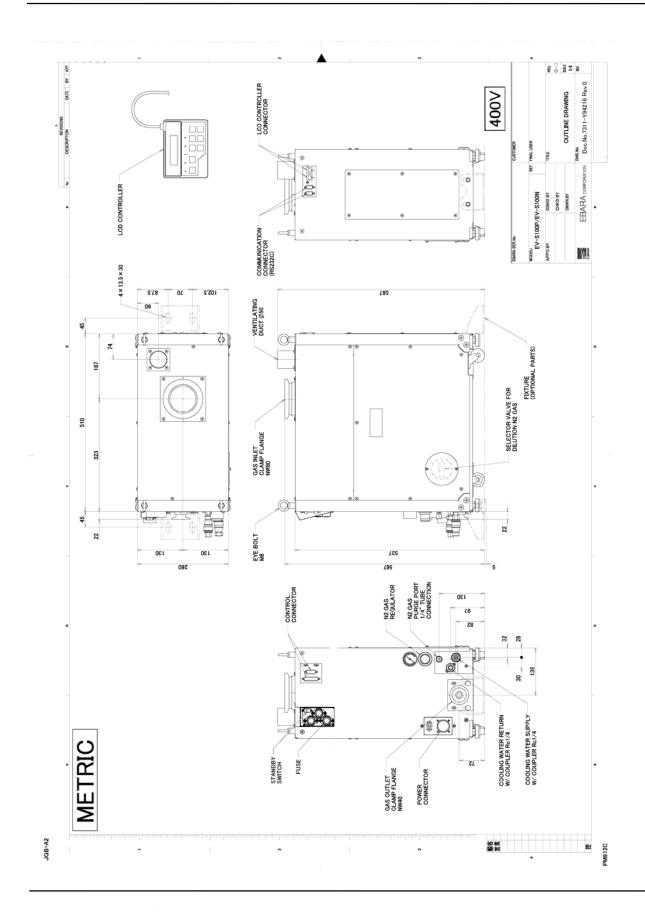



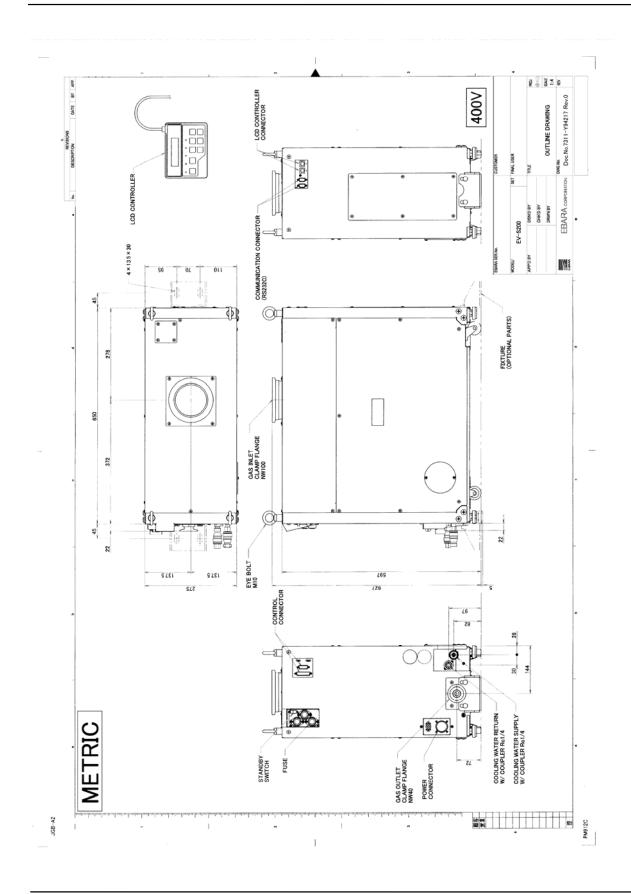



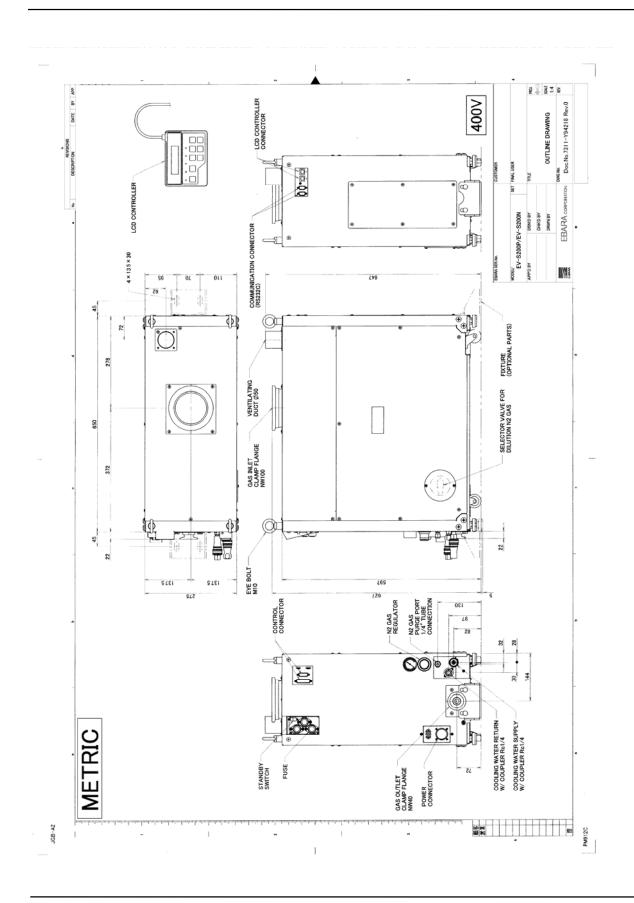



2.3.4 Performance Curve

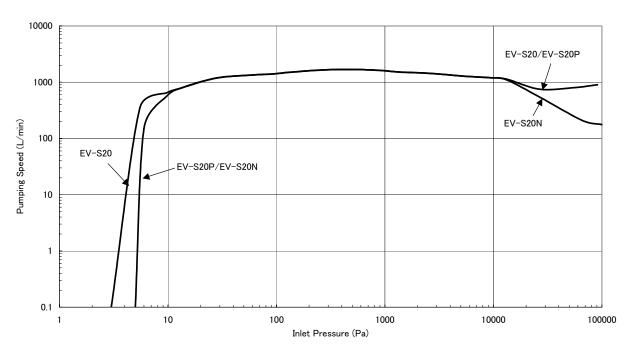


Fig 2.1 EV-S20(P/N) Performance Curve

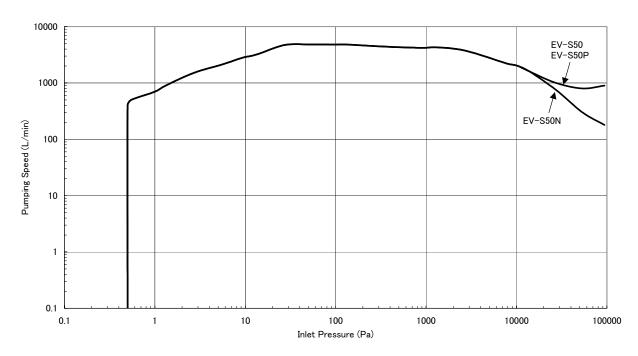


Fig 2.2 EV-S50(P/N) Performance Curve



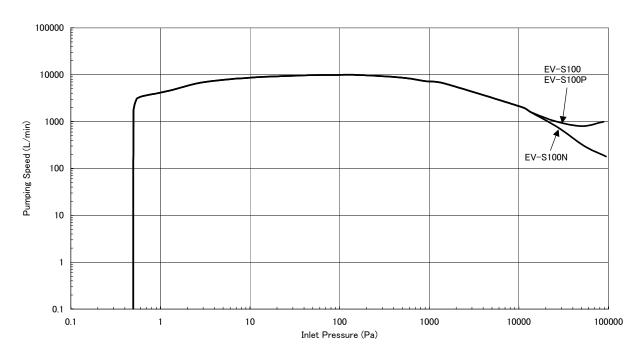


Fig 2.3 EV-S100(P/N) Performance Curve

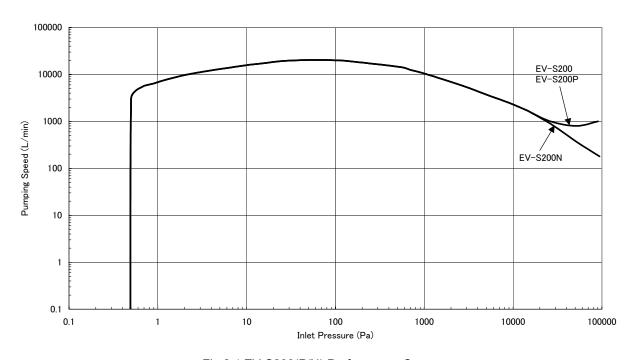


Fig 2.4 EV-S200(P/N) Performance Curve



2.3.5 System Flow LCD Controller (Gas Inlet) ${\tt Control}$ Connector Main fuse Power ControlCircuit Motor Driver 1 Motor Driver 2 Pressure Gauge P Pump N2 Gas Flow Sensor N2 Gas FT1 N2 Selector Valve Regulator Booster Pum p (Motor2) (Gas Outlet) ₿P) W ater Main Pump (Motor) MP) Cooling Water Flow Seneor Silencer Check Valve

Fig 2.5 System Flow

^{*} The EV-S20 pump is supplied without a booster pump (BP).

2.4 Release and shut off residual internal energy



WARNING

To avoid dangers potentially encountered during maintenance, transportation or storage, follow instructions below to shut off power.



∕!∖ WARNING

Capacitors within the control panel retain residual energy after interruption of power supply. Wait five (5) minutes after shutting off breaker before opening the control panel. Carefully check that bleed circuits have discharged the residual energy before servicing the control panel.



$/! \setminus$ WARNING

To comply with SEMI S2, install lockable shutoff devices on electrical, nitrogen and cooling water supplies. These devices should be adjacent to and within sight of the pump.

2.4.1 Electrical Power - Lockout and Tagout

Lock the branch circuit in the OFF position and tag it out to perform maintenance or troubleshooting.

- 1. Verify that the LCD display is lit (confirming that pump is powered).
- 2. Turn the branch circuit disconnect off.
- 3. Insert padlock through holes provided on locking device. Close padlock and attach tag.
- 4. Keep the key with you while working. Prepare the tagout label per factory procedures.
- 5. Verify that LCD display is unlit (confirming that pump is unpowered).
- 6. If unable to confirm interruption of power via LCD display, use a voltmeter to probe contacts at Connector CN-C. Potential between any two pins indicates that electrical power to the pump is not interrupted.
- 7. The Lockout/Tagout procedures must comply with OSHA 29 CFR 1910.147 and 1910.331-335

2.4.2 Cooling water

- 1. Close [facility] water supply to stop water supply to the pump, then close water return valve. Follow [facility] procedures for locking these valves in the off position.
- 2. Push the knurled outer ring of the quick-connect couplers toward the pump to disconnect the water hoses. Carefully remove the male coupling halves from the hoses and remake the quick-connects to drain the pump lines. Have a catchment vessel and absorbent cloths at hand before removing the couplings.
- 3. Make sure water outflow stops from both the facility lines and the pump.



2.4.3 Nitrogen (N₂)

- 1. Close [facility] nitrogen supply valve and follow facility procedures for locking this valve in the off position.
- 2. Verify that the nitrogen pressure gauge (on front panel of the pump) drops to 0 MPa, confirming that no pressurized gas energy is stored in the pump.
- 3. Pull out the red detent ring on the N2 regulator.
- 4. Turn knob counterclockwise until pressure gauge reads 0 MPa. (Both N2 regulator knob and nitrogen pressure gauge are located on front panel of the pump.)
- 5. Disconnect tube connection of N2 supply line by turning tube nut counterclockwise.
- 6. Plug (cap) 1/4" tube connector on the pump with a tube fitting cap.

2.4.4 Returning to Service

- 1. Unlock and open water and nitrogen valves.
- 2. Remove handle stop bracket and switch circuit breaker on.
- 3. Restrart pump and open foreline valve only after appropriate leak checks and safety verifications.



3. Installation

Pump performance is changed by the setting conditions such as the size / length of pump linlet / outlet.

Please choose the parts suitable for use condition in the piping and a seal part.

For lifting the pump, use only qualified operator personnel. Be sure that the wire rope and crane used for lifting the pump are in proper order and match the weight of the pump. To prevent unequal weight distribution, suspend the pump by ensuring that the slinging angle remains symmetrically centered.




Fig 3.1 Lifting the Punp



/!\ DANGER

Do not enter the zone underneath the suspended pump.



/!\ WARNING

For lifting the pump, use only qualified operator personnel. Be sure that the wire rope and crane used for lifting the pump are in proper order and match the weight of the pump. To prevent unequal weight distribution, suspend the pump by ensuring that the slinging angle remains symmetrically centered.

3.1 Movement and Fixation

3.1.1 Location

This pump is designed for indoor installation. To install the pump, select a place with little exposure to dust and humidity and not subject to dew condensation. Also allow for sufficient space to ensure easy pump installation and disassembly for maintenance. In case of installing interface box to the pump, the distance between pump and interface box shall be 3m or less.



Note

Install pump in a location at an ambient not exceeding 30°C. Particular caution is required when the pump is operated in an enclosed room.

Note

A gap of at least 50mm should be left open for ventilation between the pump cover and the adjacent equipment.

3.1.2 Caster and adjustment foot

Casters and adjusters of four each are attached under the pump base. When moving the pump, lift up all of the four adjusters. To lift them up, use the wrench and turn them to the left.




Fig 3.2 Caster



/!\ WARNING

Be careful not to overturn the pump when pushing and pulling it sideways, because the width of the pump is small to its height.



CAUTION

The neck portion of the casters will vibrate during caster movement. Be sure to keep your fingers and feet out.



∕!∖ CAUTION

Do not step on the pump or place objects on it.

- (1) To fix the pump, turn the adjusters to the right to lower them.
- (2) Adjust the height of the feet evenly to ensure that the pump base is level.

Note

If the pump is not leveled, shortage of the lubrication oil supply to the bearing may be caused.



Note

Floor vibrations will increase unless the adjustment feet are used.


3.1.3 Pump Fixation (Option)

The pumps are provided with casters for easy transportation and foot adjustments for anchoring and height adjusting, as described in Section 3.1.2. The pump, however, may unexpectedly move or fall down when an earthquake occurs. To prevent such events, EV-S dry pumps (CE/SEMI compliant) are equipped with brackets to secure the pump body to the floor. Fix the pump to the floor or other firm ground with the brackets at the installation.


For dimensions of the bracket, see the accompanying drawing.

Anchor bolts should be fit for conditions of the floor where the pump is anchored.




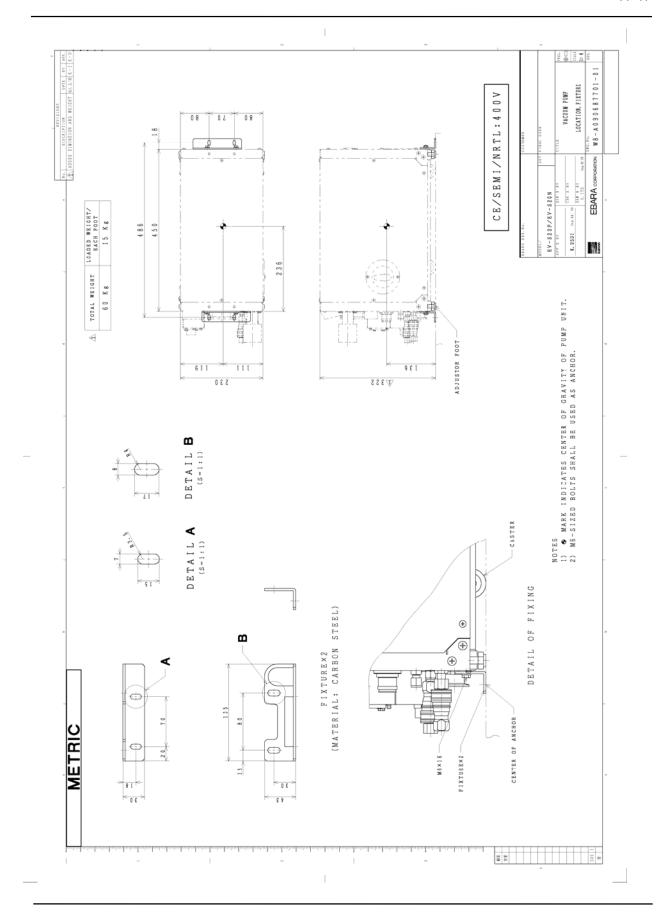




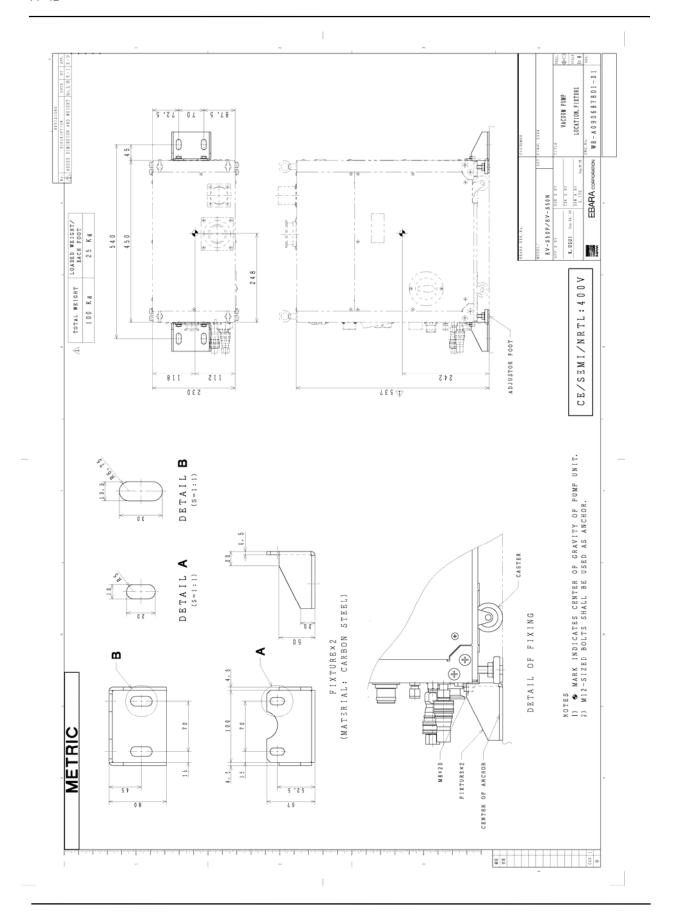



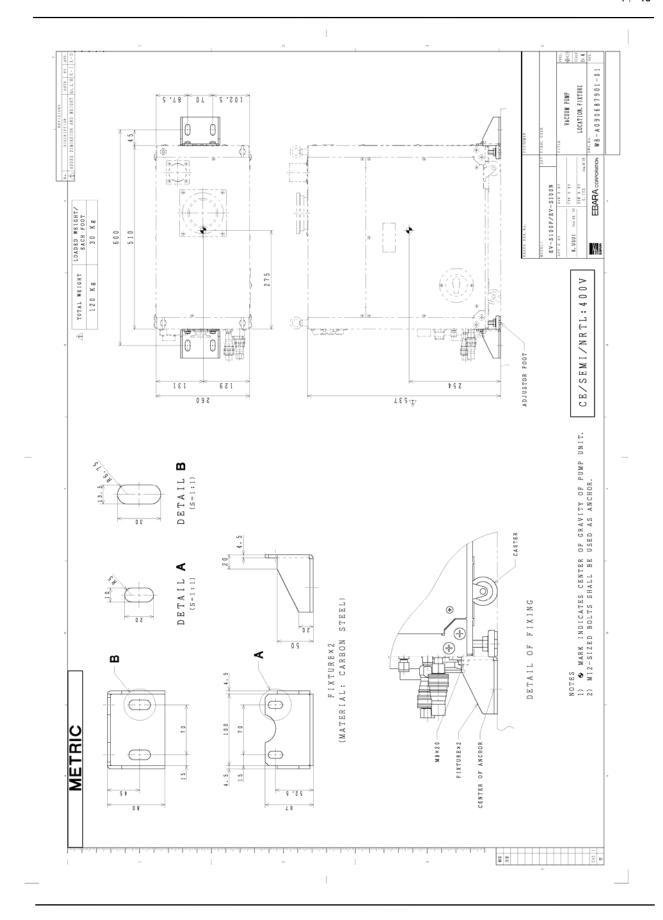



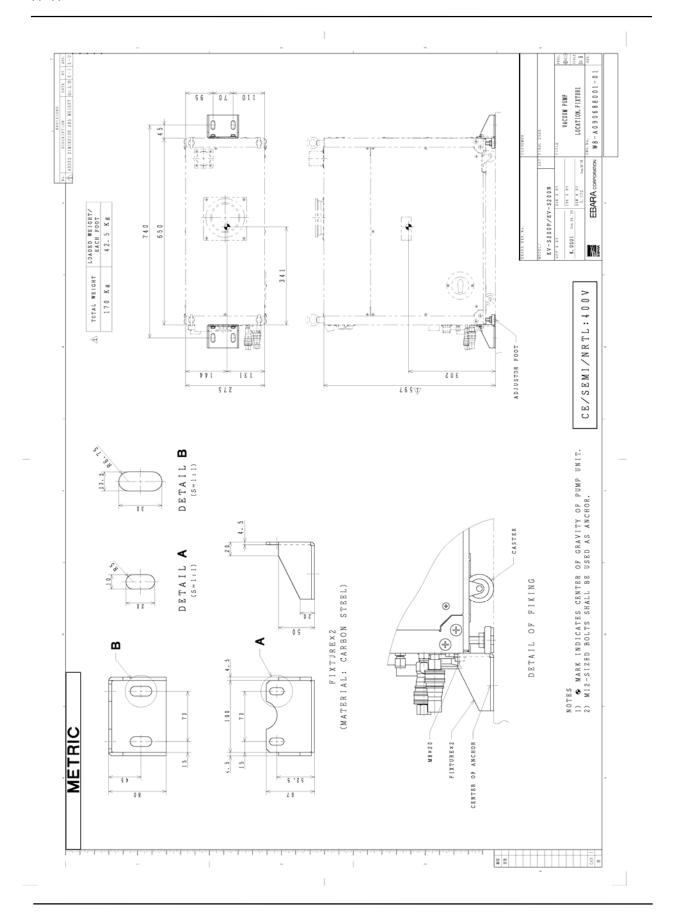



3.2 Piping

3.2.1 Vacuum and Exhaust Piping

Connect the vacuum and exhaust pipes to the suction and exhaust flanges.

A narrow clearance is maintained in the pump for rotor rotation. The ingress of foreign objects into the pump interior will therefore prevent the pump from operating. Be sure therefore to heed the following cautions when making the pipe connections.

- a) Remove all foreign matter from inside the piping.
- b) When connecting be sure that no dirt or dust particles adhere to the flange surfaces and/or that the flange surfaces are damaged. Provide a suitable means of preventing the ingress of reaction by-products adhering to the pipes and wafer fragments. For this purpose, a filter may be installed.
- c) The weight of the pipes attached to the pump can cause misalignment and leaks from the flange connections. Be sure therefore to support the piping properly and not to apply undue force when aligning the flange faces. It is recommended to insert flexible bellows when connecting the pipes to the suction and exhaust flanges of the pump. The length of the flexible bellows on the vacuum (suction) side will vary according to the vacuum drawn. Be sure to connect so that no undue force can be applied to the flexible bellows.
- d) Please decide a part to connect to the pump exhaust so that the exhaust pressuret is not beyond atmospheric pressure.



∕!\ WARNING

Be sure to check for leaks after you have installed the pump. Leaks will cause serious danger due to the discharge of harmful and hazardous substances and the occurrence of unpredictable reactions associated with the admission of air into the pump (for a leak check with pressurization, apply a pressure of 0.05 MPa at the N2 gas purge port).



∕!\ WARNING

The pump casing, inlet piping and exhaust piping become extremely hot during operation and for some time after stopping. Be sure that pump and exhaust piping do not come in contact with humans or inflammable substances. Do not remove the pump cover during operation.



∕!∖ CAUTION

The exhaust piping made by polyvinyl chloride causes the noise thrugh the pipe.

3.2.2 Cooling Water Piping

Be sure to connect the cooling water pipes to the correct inlet and outlet ports. The connector ports are provided with couplers. Push in the plug till the end of socket. Socket sleeve returns to front. When the coupler is pulled out the water pipe will be automatically blocked. Use cooling water corresponding to the specifications of Table 3.1 below.

Table 3.1 Industrial Water Supply Quality Specification

(Japan Industrial Water Association, Industrial Water Quality Standards Committee)

Turbidity	(ppm)	20
pН		6.5-8.0
Alkalinity(CaCO3)	(ppm)	75
Hardness(CaCO3)	(ppm)	120
Evaporation residue	(ppm)	250
Chlorine ion	(ppm)	80
Iron	(ppm)	0.3
Manganese	(ppm)	0.2



CAUTION

Even when the cooling water flow rate drops, the pump will continue to operate until the pump part reach a temperature corresponding to the safety limit. The material selected for the water piping of facility side should have a heat resistance so that it can withstand a maximum temperature of at least 70°C at the operating pressure.

Note

When several pumps are used, be sure to connect the cooling water pipes to each pump in parallel. The cooling water will flow more or less easily according to the type of pump and the piping. Be sure to select the correct piping so as to ensure the appropriate cooling water flow rate for all pipes used.

Note

When the cooling water connections are incorrect and the flow is reversed, a flow rate different from the normal value will be displayed. Nor will the pump will not be cooled properly. This will result in accident. Be sure therefore to connect correctly to avoid problems.




CAUTION

When the cooling water supply is left on while the pump is stationary dew condensation will form on the water-cooled parts in locations with high humidity. Make it a rule therefore to stop the cooling water when water droplets can be detected on the outer surface of the pump cooling water piping as this suggests the possibility of dew condensation in the

3.2.3 N2 Gas Piping

Cut tube at right angles and make the end-face perfectly smooth. Then connect the tube to the tube fitting assembly of the N2 gas purge port. The tube is a push-fit onto the shoulder of the tube fitting assembly. Secure the tube fitting assembly properly and tighten the retaining nut by hand. After this, use a tool to tighten the nut further by 1 + 1/4 turns. To connect the tube again after this, install the tube already fitted to the ferrule and re-tighten the retaining nut slightly after the initial tightening (generally, tighten by a further quarter turn after tightening by hand).

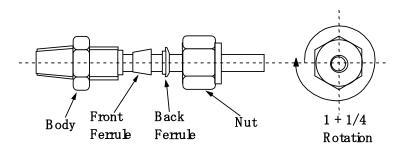

Tube Fitting Assembly Fig 3.3



WARNING

Safe operation with toxic, flammable or pyrophoric gases may require nitrogen dilution to reduce gas concentrations below flammable, explosive or toxic limits (LFL, LEL or TLV). Determining the N2 dilution flow requirement and connect a nitrogensupply to the pump exhaust line. Use an appropriate device, e.g. a switched flow meter, with a set point appropriate to the N2 requirements to monitor this nitrogen flow. Connect the normally open (LOW Flow = Open) contacts on the flow switch to an external contactor to create a Dilution N2 Interlock that de-energizes the pump if N2 flow drops below the set point. See Appendix 5.



3.3 Electrical Wiring



DANGER

Be sure to keep the power supply to the pump turned off and lock-outed until you have finished the wiring and connecting work. Also interrupt the Circuit Protector (CP) during



∕!\ WARNING

Electrical wireing shall be carried out only by qualified electricians.



∕!∖ WARNING

ELB (or CB) is not installed in the pump unit. Please install ELB(or CB) based on the law and the standard in the installation region. (Refer to "9. For SEMI S2 standard" about the SEMI S2 standard correspondence.)



$^{\prime !}ackslash$ WARNING

Do not perform a withstand voltage test. Failure to comply could result in damage to the sensitive devices.



/!\ CAUTION

Do not apply the power supply from the pump's power pack to any other equipment as this will result in malfunctioning of the control units and in pump failure.

3.3.1 Power Supply Wiring



WARNING

Be sure to connect



∕!\ CAUTION

Use the correct wiring materials and size to match the operating conditions in accordance with the power consumption rating and ambient air temperature of the pump.

Wire the connector for the main power supply (380-440V AC at 3-phase and 50 / 60Hz). Figs. 3.4 and 3.5 and Tables 3.2, 3.3, 3.4 and 3.5 show the connector pin assignment. Connector pin is a screw fix type. Please make sure to tighten the screw enough to fix the connector pin. Please wire the connector pin by the specialized tool.






Fig 3.4 Power Supply Receptacle (As seen from connecting side)

Table 3.2 Pin Assignment of Power Supply Receptacle


NO.	Phase
1	R
2	S
3	Т
4	GND

Table 3.3 Receptacle Specification

	receptable opermeation
Pump model	EV-S20
Receptacle type	C016 20C003 100 12
Recep. Manufacturer	Amphenol
Adapted plug type	C016 20D003 100 12
Suitable wire	AWG #14
Power capacity kVA	3.2

^{*} Plug contact is a screw fix type. Please make sure to tighten the screw enough to fix the Plug contact.

Table 3.4 Pin Assignment of Power Supply Receptacle



NO.	Phase	
Α	R	
В	S	
С	Т	
D	GND	

Table 3.5 Receptacle Specification

Pump model	EV-S50	EV – S100 EV – S200						
Receptacle type	JL04HV-2E22-22PE-B							
Recep. Manufacturer	Japan Aviation Electronics Industry Co., Ltd.							
Adapted plug type	JL04V-6A22-22SE-EB							
Suitable wire	AWG #12	AWG #10						
Power capacity kVA	4.8	6.4 6.8						



3.3.2 Control Signal Wiring

Connect wires to the control connector for remote operation and remote monitoring.

Tables 3.6, 3.7, 3.8 and 3.9 and Figs 3.6 and 3.7 show the pin assignment.

Table 3.6 Receptacle Specification

Connector No.	Connector type
CN-Z	15 pin D sub-miniature Female receptacle (In accordance with SEMI-F-73-0299)
CN-Y	25 pin D sub-miniature Female receptacle

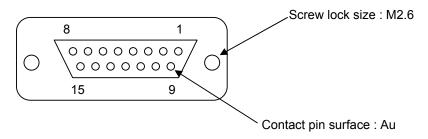


Fig 3.6 15 Pin D Sub-Miniature Female Receptacle (As seen from connecting side)

Table 3.7 Control Connector Pin Assignment (CN-Z: In accordance with SEMI-F-73-0299)

Pin. No.	Signal name	I/O	Signal type
1	MP START (+)	IN	Run:CLOSE , Alternate
2	BP START (+)	IN	Run CLOSE, Alternate
3	MP START STATUS (+)	OUT	Run:CLOSE, Alternate
4	BP START STATUS (+)	OUT	Run:CLOSE, Alternate
5	WARNING STATUS (+)	OUT	WARNING:OPEN, Alternate
6	ALARM STATUS (+)	OUT	ALARM:OPEN, Alternate
7	REMOTE STATUS (+)	OUT	REMOTE:CLOSE
8	-		
9	MP START (-)		
10	BP START (-)		
11	MP START STATUS (-)		
12	BP START STATUS (-)		
13	WARNING STATUS (-)		
14	ALARM STATUS (-)		
15	REMOTE STATUS (-)		

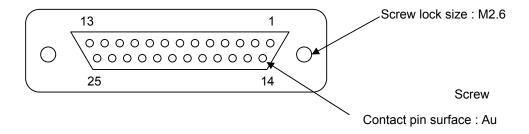


Fig. 3.7 25 Pin D Sub-Miniature Female Receptacle (As seen from connecting side)

Table 3.8 Control Connector Pin Assignment (CN-Y)

Table 3.8 Control Connector Pin Assignment (CN-Y)								
Pin No.	Signal name	I/O	Signal type					
1	RESET (+)	IN	RESET:CLOSE					
2	SAVING ENERGY CONTROL (+)	IN	SAVING ENERGY:CLOSE, Alternate					
3	RESERVED (+)	IN						
4	RESERVED (+)	IN						
5	RESERVED (+)	IN						
6	EMO STATUS (+)*1	OUT	Abnormality:OPEN, Alternate					
7	PUMP N2 WARNING STATUS (+) *2	OUT	Abnormality:OPEN, Alternate *3					
8	RESERVED (+)	OUT						
9	SAVING ENERGY STATUS (+)	OUT	SAVING ENERGY:CLOSE, Alternate					
10	RESERVED (+)	OUT						
11	RESERVED (+)	OUT						
12	RESERVED (+)	OUT						
13	-							
14	RESET (-)							
15	SAVING ENERGY CONTROL (-)							
16	RESERVED (-)							
17	RESERVED (-)							
18	RESERVED (-)							
19	EMO STATUS (-)*1							
20	PUMP N2 WARNING STATUS (-)							
21	RESERVED (-)							
22	SAVING ENERGY STATUS (-)							
23	RESERVED (-)							
24	RESERVED (-)							
25	RESERVED (-)							

^{*1} EMO is optional.

^{*3} Switching to N.C. is allowed by changing the DIP switch settings (see 5.4 DIP Switch).



^{*2} Only EV-**P / EV-**N

Table 3.9 CN-Z & CN-Y Signal Contacts Pum p side Circuit Customer's connection 12VDC $1k\,\Omega$ Input Signal 10m A Min. 0 pen Collector Dry Contact Pum p side C ircu it Customer's connection $4 \mathrm{VDC}$ – $27 \mathrm{VDC}$ 100m A Max. Open Collector Output Signal $4 \mathrm{VDC} - 27 \mathrm{VDC}$ EMO 100m A M ax. Dry Contact



Note

Do not wire vacant pins.

Note

Apply a 12V DC power for input signals on the pump side. Do not apply this voltage on the equipment side. The output signals are generated from an open collector output. Please use it by the equipment side, impressing the power supply of DC4V to DC27V.

Note

Be sure to wire all signals with the correct polarity (SIG./COM.).

Note


When output signals are used to energize an inductive load such as a relay, be sure to insert a diode (100V. 1A class) in order to absorb the back electromotive force due to surge currents.



3.3.3 External Interlock Connector (EXT I/L)

The EXT I/L connector, which provides contacts that open in the event of a pump ALARM, may be used to signal an external device, such as a gas dispense box, of a pump problem.

Wire this connector as shown below:

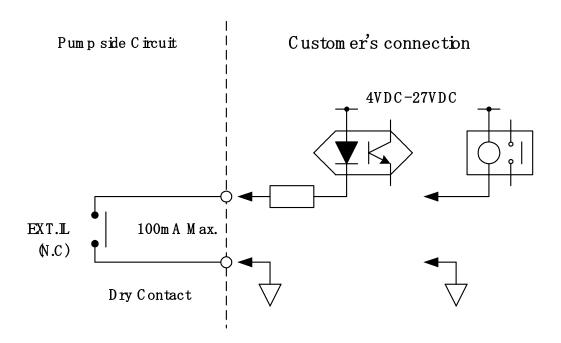

4. Power Supply for the Options (Connector CN-C)

This Power Supply is used for the options listed below and should not be used for other purposes.

For example:

ADAPTER for Central Monitoring System


Interface Controller

Note

Do not use the power supply for other purposes.



5. LCD Controller 5.1 LCD Outline



[Buttons]	START	For start of MP
	STOP	For stop of MP
	▲ ▼	For changing LCD indication
	RESET	For resetting WARNING and ALARM
	BZ. OFF	For "buzzer mute in WARNING / ALARM "
	ENTER	For using at DIP switch selection
[LED]	BP RUN	BP running (It doesn't operate in EV-S20(P/N))
	MP RUN	MP running
	LOCAL	LOCAL mode
	WARNING	WARNING condition
	ALARM	ALARM condition

Fig 5.1 LCD controller

5.2 LCD Indication

The operating status of the pump is displayed on the LCD of the controller.

For details of display, see Tables 5.1.

Table 5.1 LCD controller indication

NIa	Table 5.1 LCI		iiii	Jiici	ш	iica	LIOI			A T1/	- N.I.						
No	ITEM							INI	טוכ	ATIC	JN						
1	Power	В	Р	:		#	#		#	#		k	W				
		М	Р	:		#	#		#	#		k	W				
2	Control mode	С	0	N	Т	R	0	L	:	L	0	С	Α	L			
	Pump running mode	М	0	D	Е	:	Ν	0	R	M	Α	L					
3	Running history	Р	U	M	Р		R	U	Ν	N	I	Ν	G				
	(Indication of history)	Н	I	S	Т	0	R	Υ	?								
4	Alarm history	Α	L	Α	R	M	/	W	Α	R	Ν	I	Ν	G			
	(Indication of history)	Н	I	S	Т	0	R	Υ	?								
5	Pump type voltage	*	*	*	*	*	*					#	#	#	٧		
	Pump unit No.	&	&	&	&	&	&	&	&								
6	Total operation time	0	Р	Е		Т	I	М	Е								
						#	#	#	#	#		h					
7	Back Pressure	В	Α	С	K		Р	R	Е	s	s	U	R	Ε			
					#	#	#		#		k	Р	а				
8	Pump N2 gas flow	Р	U	М	Р		N	2		F	L	0	W				
						#	#		#		Р	а	m	3	/	s	
9	Cooling water flow	W	Α	Т	Е	R		F	L	0	W						
						#	#		#		L	1	m	i	n		
10	Pump casing temperature	С	Α	S	I	N	G		Т	Е	М	Р					
						#	#	#		0	С						
11	Motor speed	В	Р	:		#		#		k	m	i	n	-	1		
		М	Р	:		#		#		k	m	i	n	-	1		
12	WARNING/ALARM	\$	\$	\$	\$	\$:	\$	\$	\$	\$	\$	\$	\$			%
		\$	\$	\$	\$	\$	\$	\$	\$	\$	\$	\$	\$	\$	\$		

- 1. Two control modes are available: "LOCAL (local operation) " and "REMOTE (remote operation) ".
- 2. Two running modes are available "NORMAL (rate operation)" and "S.ENERGY (energy-saving operation)"
- 3. " % " shows present number of WARNING/ALARM.
- 4. Upper row "\$\$\$\$\$" distinguishes between WARNING/ALARM and indicates the position where WARNING/ALARM has occurred.



- 5. Total pump operating time gives the total hours of operation after shipment from the factory.
- 6. The display will return to the motor current indication when no operation takes place after the lapse of 1 minute.
- 7. Use the Display Select Switch (▲ ▼) to change the display. The WARNINGs/ALARMs that have currently been generated can be displayed with the Display Select Switch.

See Fig. 6.2 for the key operation of the pump operation status display.



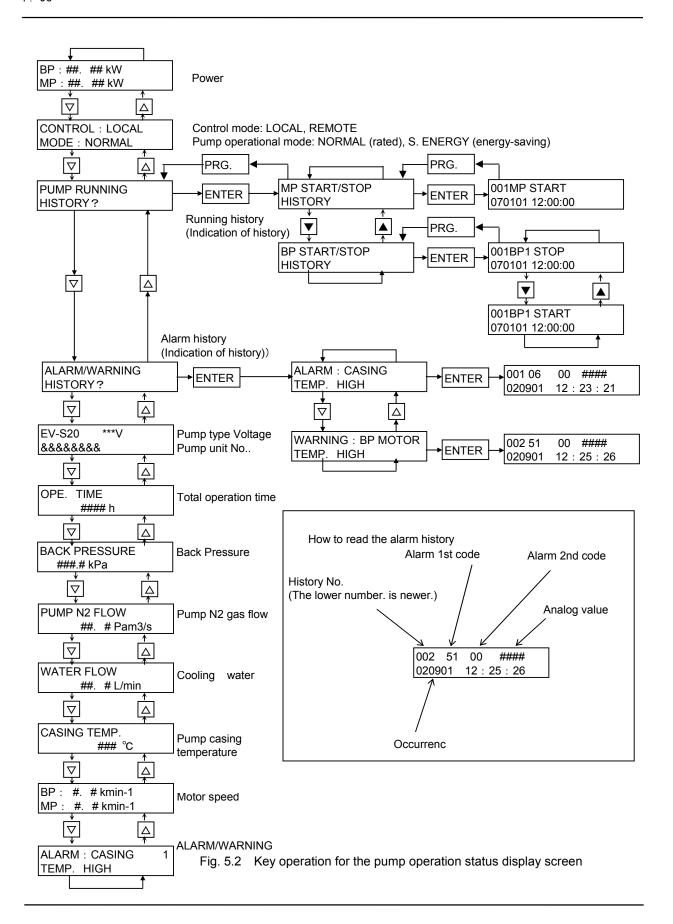




Table 5.2 Alarm code list

	Co	de
ALARM name	1st	2nd
ALARIVI Harrie	code	code
MP casing temp.	50	01
BP motor temp.	51	00
MP motor temp.	52	00
Water Leakage (▲)	53	00
Back pressure high (▲)	63	00
Power failure	64	00
MP's driver protective circuit activated (OC)	65	01
MP's driver protective circuit activated (OV)	65	02
MP's driver protective circuit activated (OH1)	65	04
MP's driver protective circuit activated (OH2)	65	05
MP's driver protective circuit activated (CPF)	65	06
MP's driver protective circuit activated (UV)	65	07
MP's driver protective circuit activated (DRE)	65	09
BP's driver protective circuit activated (OC)	66	01
BP's driver protective circuit activated (OV)	66	02
BP's driver protective circuit activated (OH1)	66	04
BP's driver protective circuit activated (OH2)	66	05
BP's driver protective circuit activated (CPF)	66	06
BP's driver protective circuit activated (UV)	66	07
BP's driver protective circuit activated (DRE)	66	09
BP overload 2	67	00
MP overload 2	68	00
BP step out	69	00
MP step out	70	00
Emergency stop (EMO) (▲)	71	00
Low cooling water	73	00
External interlock	74	00
Motor thermostat	81	00
Inner communication error (MP driver)	81	01
Inner communication error (IO)	81	02
Inner communication error (BP driver)	81	03
MP Driver Gate OFF	81	20
BP Driver Gate OFF	81	21

	Co	de	
WARNING name		2nd	
WARNING Hallie	code	code	
Low cooling water	00	01	
MP casing temp.	05	01	
High board inner temp.	13	00	
Pump N2 0mode error	14	01	
Low pump N2	18	01	
Back pressure high (▲)	21	01	
Back pressure wire broke (▲)	21	02	
BP motor temp.	23	00	
MP motor temp.	24	00	
Inner communication error (MP driver)	26	01	
Inner communication error (BP driver)	26	02	
Inner communication error (IO)	26	03	
Inner communication error (AI)	26	04	
Inner communication error (DVP413)	26	20	

The mark "▲" indicates the item is optional.



5.3 Setting the operational mode

This section describes how to set the operational mode. In the normal state, the LCD controller displays pump status. To display the operational mode setting screen, press the key "PRG." for three seconds or longer. Pressing the key for one second or longer again returns to the pump status display screen. Table 5.3 below shows indications and the details of the operational mode setting.

Table 5.3 Operational mode setting screen

Item	Indication	Description
Setting the pump operation control mode	SET CONTROL MODE?	Switches the control modes: local and remote.
Setting the DIP switch	SET DIP SW?	Performs the DIP switch settings (see 6.4).
Setting the pump running mode	SET RUNNING MODE?	Switches the running modes: NORMAL and S. ENERGY.
Setting the rotational speed in the NORMAL mode	SET NORMAL SPEED?	Sets the pump rotational speed in the NORMAL mode.
Setting the rotational speed in the S. ENERGY mode	SET S.ENERGY SPEED?	Sets the pump rotational speed in the S. ENERGY mode.
Setting the pump N2 flow low warning threshold	SET POINT PUMP N2 WARNING?	Set the pump N2 flow low warning threshold
Setting the Cooling Water flow low warning threshold	SET POINT WATER FLOW?	Setting the Cooling Water flow low warning threshold
Setting the Back pressure high warning threshold	SET POINT BACK PRES.?	Set the Back pressure high warning threshold

Keys work as below for the setting screen.

START Valid

STOP Stops the pump.

RESET Resets WARNING and /or ALARM.

BZ.OFF Switches the DIP switch No.

▲ Sets the DIP switch to ON. Switches the display of the operational mode setting

screen.


▼ Sets the DIP switch to OFF. Switches the display of the operational mode setting

screen.

ENTER Determines the selected setting.


See Fig. 5.3 for how to set the operational modes.



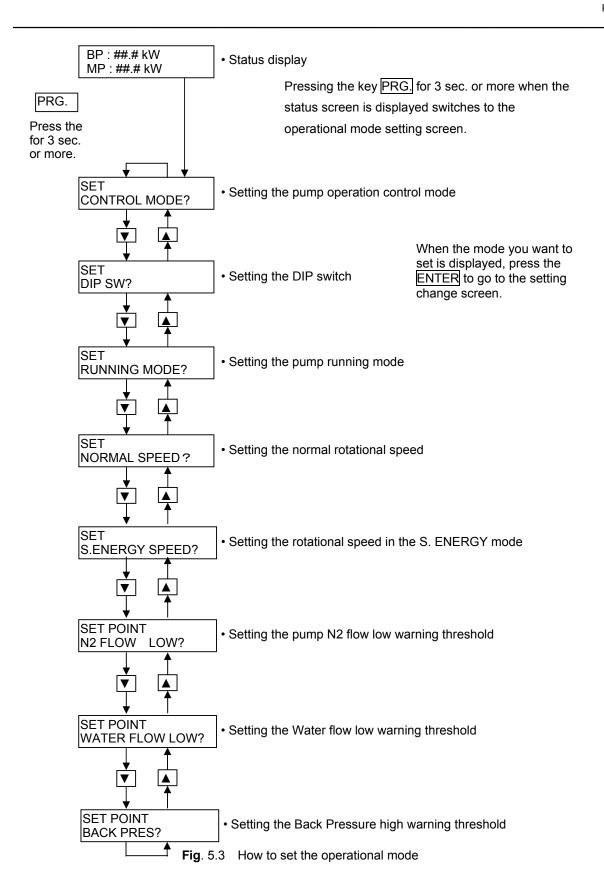

5.3.1 Setting the pump operation control mode

A case of display if Local mode selected.

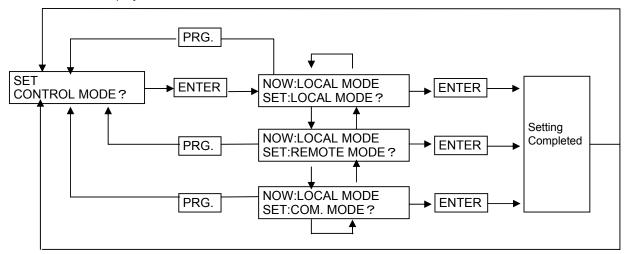

REMOTE MODE: Enables the remote operation

(start/stop with external signals)

LOCAL MODE : Enables the local operation

(start/stop with the LCD controller)


COM MODE : Enables the communication operation

(start/stop with RS232C communication)

The mode which is currently not set is displayed.

If you do not need to set, press PRG. key to go back to the previous screen.


5.3.2 Setting the DIP switch

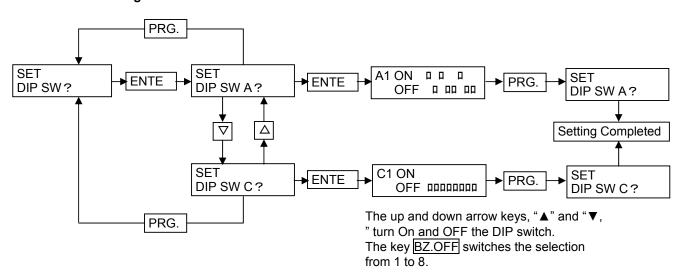

See 5.4 for details of the DIP switch.



5.3.3 Setting the pump running mode

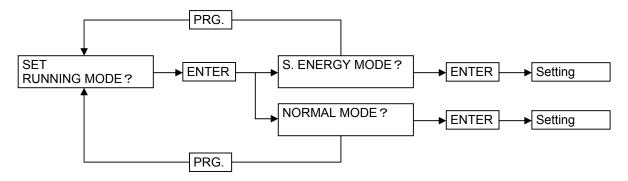

S.ENERGY MODE : Enables the energy-saving operation


NORMAL MODE : Enables the rated operation.

The mode which is currently not set is displayed.

If you do not need to set, press the key

PRG. to go back to the previous screen.

5.3.4 Setting the rotational speed in the NORMAL mode

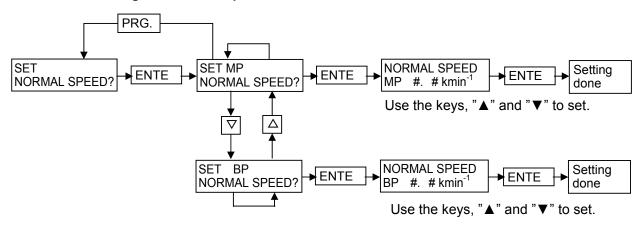


- ▲ Use the up and down arrow keys to change the setting value.
- ▲: Increase the setting speed by 0.1 kmin⁻¹.
- ▼: Decrease the setting speed by 0.1 kmin⁻¹

Upper limit MP/BP: The value lower than the set value for the rated speed

Lower limit MP/BP: 4.0 kmin⁻¹



5.3.5 Setting the rotational speed in the S. ENERGY mode

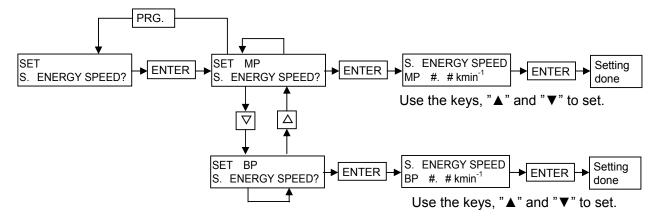

△ ∇ Use the up and down arrow keys to change the setting value.


 \triangle : Increase the setting speed by 0.1 kmin⁻¹.

∇ : Decrease the setting speed by 0.1 kmin⁻¹

Upper limit MP/BP: The value lower than the set value for the rated speed

Lower limit MP/BP: 1.0 kmin⁻¹

5.3.6 Setting the pump N2 flow low warning threshold

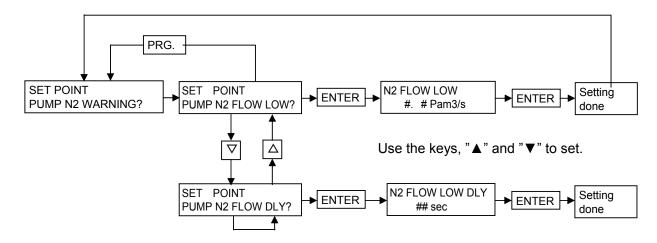

riangle Use the up and down arrow keys to change the setting value.

 \triangle : Increase the setting speed by 0.1 Pam³/s (Delay time : 1 sec)

 ∇ : Decrease the setting speed by 0.1 Pam³/s (Delay time : 1 sec)


Upper limit : 81.0 Pam³/s (Delay time : 60 sec)

Lower limit : 3.0 Pam³/s (Delay time : 5 sec) (DIP SW A7:OFF)

Lower limit : 1.6 Pam³/s (Delay time : 5 sec) (DIP SW A7:ON)



5.3.7 Setting the Water flow low warning threshold

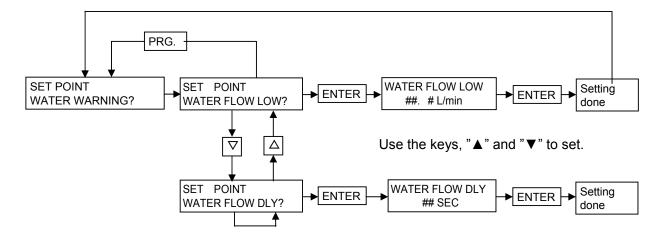


△ ∇ Use the up and down arrow keys to change the setting value.

△ : Increase the setting speed by 0.1 L/min (Delay time : 1 sec)
 ✓ : Decrease the setting speed by 0.1 L/min (Delay time : 1 sec)

Upper limit : 10.0 L/min (Delay time : 60 sec)
Lower limit : 1.0 L/min (Delay time : 5 sec)

5.3.7 Setting the Back Pressure high warning threshold

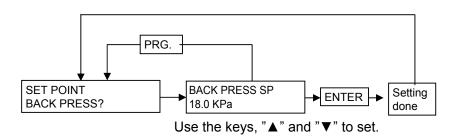

 \triangle : Increase the setting speed by 0.5 kPa ∇ : Decrease the setting speed by 0.5 KPa

Upper limit : 30.0 KPa Lower limit : 5.0 KPa

5.4 Dip Switch

Set the dip switches to select the operating modes as shown in Tables 5.4, 5.5 and 5.6

Table 5.4 Dip Switch-A Settings

No.	Mode	Off	On	Default
1	Data length	ngth 7 bits		On
2	Cooling water & N2 monitoring	Constant	Only during operation	Off
3	Buzzer	Not used	Used	On
4	Operation switched to Remote	According to signal	PUMP STOP	Off
5				
6				
7	Dil N2 mode	Standard mode	Dil N2-0 mode	Off
8	the BP start mode	Automatic	Manual	Off

Table 5.5 Dip Switch-B Settings

				
No.	Mode	Off	On	Default
1	MP Speed control	Not used	Used	Off
2	BP Speed control	Not used	Used	Off
3				
4				
5				
6	Equipped with the remote interface.	Optional	Standard	On
7				
8	Initializes the LCD screen.	Initializes	Not initialize	Off

Table 5.6 Dip Switch-C Settings

No.	Mode	Off	On	Default
1	Outputs the pump N2 warning.	Normal Open	Normal Close	Off
2				
3				
4				
5				
6				
7				
8				

- DIP SW-A. No.1 This switch allows you to select the data length out of 7 or 8 bits for the pump running status monitoring with the RS232C communication port.
- DIP SW-A. No. 2 This switch allows you to select out of "Constant" or "Only during operation" for the cooling water and N2 monitoring. When "Only during operation" is selected for the cooling water monitoring, monitoring will be continued for 15 minutes after the pump operation has stopped for cooling the pump. Note that the N2 purging is recommended to continue during the pump stoppage as well because it will reduce accumulation of by-products and corrosion of the pump.



DIP SW-A. No. 3 This switch allows you to select whether an acoustic alarm (buzzer) should be sounded or not when a WARNING/ALARM signal has been generated.

Note

You can change the setting of No. 3 (Buzzer) and tEMOTR/LOCAL switch anytime. When the DIP SW settings other than No. 3 are changed, the LCD controller starts counting down from 10 seconds right after the setting change, which is similar to the situation when

DIP SW-A. No. 4 This switch allows you to select "According to Signal" or "PUMP STOP" when this switch is moved from the LOCAL to the REMOTE position. When the former is selected, the pump is started/stopped in response to the external start signal. When the latter is selected, the pump is stopped regardless of the external signal.

DIP SW-A. No. 7

- DIP SW-A. No. 8 When dip switch-A No. 8 has been set to the REMOTE (Remote Operation) position, it is possible to operate the Booster Pump (BP) by selecting "AUTOMATIC Operation" or "START/STOP in Response to External Signal Input."
- DIP SW-B. No. 1 When you control MP speed by external signal, set dip switch-B No.1 to ON.
- DIP SW-B. No. 2 When you control BP speed by external signal, set dip switch-B No.2 to ON.
- DIP SW-B. No. 6 This switch allows you to select "USE" or "UNUSE" of the Interface Box (an option) using the LAN-W.To use the interface: set the switch to ON.Not to use the interface: set the switch to OFF.

Note

With this switch set to ON, signal output from the control signal connectors (CN-Z and CN-Y) that are directly connected to the pump is prevented although that from the dedicated interface is allowed.

- DIP SW-B. No.8 This switch allows you to select "Initializes" or "Not initialize" for LCD screen display (by default, the screen display returns to a current reading display in 60 seconds).
- DIP SW-C. No.1 This switch allows you to select "NORMAL OPEN" or "NORMAL CLOSE" for PUMP N2 WARNING output.



5.5 DIP Switch setting display




Fig 5.4 LCD controller

Key functions will be as follows on the setting display.

START : Invalid

STOP : This stops pump operation.

RESET: This resets ALARM and WARNING.
 BZ . OFF: This switches the dip switch numbers.
 Δ: This sets the selected dip switch ON.
 ∇: This sets the selected dip switch OFF.

ENTER : Move display level. Or indicate set up conditions.

DIP Switch-A



DIP Switch-B



^{*} indicates the dip switch number (1 to 8) currently you are setting.

Fig 5.5 DIP Switch

Note

Duration of pump operation, dip switches, except A-3 (BUZZER) and B-3 (Initializes the LCD screen), can not be used for parameter setting.

Note

When parameter setting of the dip switches, other than dip switch-A No.3 (BUZZER) and B-8 (Initializes the LCD screen), is performed, the LCD controller counts down 10 seconds, the same as at the power on state, right after the completion of the parameter setting.



Note

If any warning or alarm occurs during the parameter setting, the setting session will be stopped automatically and the display will be changed to the warning & alarm display screen.

The dip switch setting at the time of shipment from the factory are as follows.

Data length : 8bits BUZZER : USE

Operation switched to Remote : According to signal Pump N2 Mode : Standard Mode

Cooling water & N2 monitoring : Constant

BP Operation in Remote : Automatic Operation



6. Operation

6.1 Before Starting

(1) Turn on the cooling water supply and check that there are no leaks at the pipe connections.



CAUTION

Without sufficient cooling water, the pump temperature will rise and problems such as rotor contact will occur.

Note

The pump unit itself has no cooling water flow adjustment valve.

(2) Turn on the N2 gas supply. (Only EV-S**P / EV-S**N)

Check that the regulator attached to the pump is closed. (It is closed when the pressure adjustment knob is fully turned in the counterclockwise direction.) Open the main valve and check that there are no N2 gas leaks from the pipe connections.

Slowly turn the pressure adjustment knob clockwise to set the pressure (gauge pressure) to 0.1 MPa first. Then press the red stopper to lock the knob in position.



$^{\prime !}ackslash$ WARNING

Be sure to purge with N2 gas in order to prevent corrosion and reduce the formation / deposition of reaction by-products in the pump. When inflammable and/or toxic gases are diluted with N2 to the safe concentration, be sure to maintain a separate supply of N2 gas to the pump exhaust pipe.



∕!\ CAUTION

Abrupt rotation of the pressure adjustment knob will cause the pressure indicator needle of the regulator to wobble and result in an inaccurate pressure display.



/!\ CAUTION

Unless a sufficient supply of N2 gas is maintained, serious problems will occur such as pump corrosion and accretion of reaction by-products.

Operate the N2 gas selector valve in accordance with the dilution N2 mode set by DIP switch-A No. 7.

If DIP Switch is set to OFF

Open Valve.

If DIP Switch is set to ON

Close Valve.



Note

For normal operation, open the N2 gas selector valve. To save N2 gas set close the valve when the production process does not lead to the formation of reaction by-products in the pump or when the process uses non-corrosive gases.

Note

The N2 gas selector valve is positioned on the right panel when viewing facing the utility side of the pump.

Note

It takes 10 odd seconds until the flow has stabilized after you have operated the N2 gas selector valve.

(3) Turn on the power supply to the pump.



/!\ WARNING

CB is not installed in the pump unit. Please install CB based on the law and the standard in the installation region.

- (4) Turn on the standby switch. (LCD is illuminated)
- (5) The LCD controller counts down 10 seconds after turn on the standby switch.

Note

The pump cannot start while the measuring instruments are warming up for 10 seconds after turn on the standby switch.

(6) Check on the WATER FLOW display of the LCD Controller. (EV-S20: 1.5L/min or more, EV-S50/EV-S100/EV-S200 : 2.0L/min or more)



- (7) Re-check on the PUMP N2 FLOW display of the LCD Controller that the dilution N2 gas flow rate is within the 17 21Pam3/s range. Also check that the pressure gauge shows a reading of 0.09 0.12MPa. After setting the pressure, press the red stopper to lock the knob in position. In this condition, the shaft sealing N2 flow rate is 2.0 2.5Pam3/s. (The shaft sealing N2 flow rate is contained in pump N2 flow rate currently displayed on the LCD controller.)
- (8) When the WARNING/ALARM display appears on the LCD controller or when any abnormal symptoms are found other than the display, take action in accordance with 10. "Troubleshooting." Even when the cause of the WARNING/ALARM display has been removed, it is maintained until the RESET signal is entered. Either press the RESET button or enter an external RESET signal from the control signal connector. In the BUZZER Enabled mode using DIP switches, it is possible to stop the buzzer by pressing the BZ.OFF button when the alarm is being generated.
- (9) When the pump exhaust pipe is equipped with a valve, open this valve before starting the pump.



∕!∖ CAUTION

Problems will occur when the pump is operated with the valve closed as the exhaust pipe will be pressurized.

6.2 START/STOP

The DIP switches can be set at any time to select the REMOTE/LOCAL/COM modes and BUZZER Enabled function. Set in accordance with the operating conditions. (See 5.3. Setting the operational mode.)



$^{\prime !}ackslash$ WARNING

The pump and exhaust piping will remain at a high temperature during operation and for a short time after the pump has stopped. Be sure to avoid contact and keep inflammable substances out of reach. Do not remove the outer cover during operation.



/!\ CAUTION

When the production process leads to react by-products in the pump or when the process handles corrosive gases, be sure not to stop the pump until after at least 30 minutes of stopping the process gases.



$/! \setminus$ CAUTION

Process gases will remain in the vacuum pipes and the pump even after the pump has been stopped. Be sure therefore to purge for at least 1 hour after the pumps has been stopped. Do not discontinue the N2 purge when the pump is stopped only for a short



/!∖ CAUTION

The pump will remain at a very high temperature event after it has been stopped. Be sure therefore to leave the cooling water on for about 1 hour after the pump has been stopped.



/!\ CAUTION

Do not exhaust the process gases until at least 30 minutes after the pump has been The pump casing temperature will stabilize after about 2 hours and it is recommended not to start exhausting the process gases earlier than this.



/!\ CAUTION

Do not suddenly make a pump inlet port the pressure that is higher than atmospheric pressure.

When DIP switch-A No. 4 is placed into the ON position and this switch is changed from the LOCAL to the REMOTE setting the pump will stop regardless of the external signal input.



6.2.1 LOCAL (Pump Side) Start/Stop

a) START

Press the START button on the controller.

The Main Pump (MP) will start and the MP RUN lamp on the controller will light.

After this, the Booster Pump (BP) will start automatically and the B.P. RUN lamp on the controller will light.

The current is indicated on the display during pump operation.

For other status display indications, refer to Table 5.1.

Note

The pump will not start when an WARNING/ALARM has been generated. When the START button is pressed, "STARTFAIL" will appear on the display.

b) STOP

Press the STOP button on the controller. The MP and BP will stop simultaneously.

The RUN lamp goes out and the display gives a power reading of 0.0kW.

6.2.2 REMOTE Start/Stop

a) START

Enter the external "MP" start signal input from the control connector. The MP will start.

In the case of DIP SW A-8 \Rightarrow OFF : "MP" rotation reaches 3000 rpm, "BP" will start

automatically.

In the case of DIP SW A-8 \Rightarrow ON : "MP" rotation reaches 3000 rpm, input the external

"BP" start signal. BP will start.

The power is indicated on the display during pump operation. For other status display indications, refer to Table 5.1.

Note

The pump will not start when an WARNING/ALARM has been generated. When the START button is pressed, "STARTFAIL" will appear on the display.

b) STOP

Interrupt the external MP start signal and the pump will stop.



6.2.3 COM Start/Stop

a) START

Input the "MP" start command from the comunication connector. The MP will start.

In the case of DIP SW A-8 \Rightarrow OFF : "MP" rotation reaches 3000 rpm, "BP" will start

automatically.

In the case of DIP SW A-8 ⇒ ON : "MP" rotation reaches 3000 rpm, input the external

"BP" start signal. BP will start.

The power is indicated on the display during pump operation. For other status display indications, refer to Table 5.1.

Note

The pump will not start when an WARNING/ALARM has been generated. When the START button is pressed, "STARTFAIL" will appear on the display.

b) STOP

Input the "MP" stopt command from the comunication connector. The MP will stop. Interrupt the external MP start signal and the pump will stop.

Note

Please contact EBARA Sales office or service center for detail about communication specifications.

6.3 Operation when momentarily power failure happens

The momentarily power failure means that power supply voltage become 15% or less than specification (3400V or less). Pump operation is continued when the supply voltage is back to normal (more than 340V) within 1 second. Pump operation is stopped when the momentarily power failure is continued more than 1 second. Then control function is reset to original. (Additional new alarm/trip by to the momentarily power failure is not displayed in the LCD controller). There is a capacitor array in the control panel that will support the pump electronics through a power failure up to one (1) second in duration. Charging this capacitor array requires five (5) minutes after the pump is connected to line power. Following a momentary power failure, the capacitor array may need up to five (5) minutes to recharge ("reset") before the pump can ride through another one-second interruption in line power. There is no operator action required following a momentary power failure; the pump will recover automatically. In the momentarily power failure condition, pump rotor is driven by inertia due to interception of power supply. Thus, pumping performance may be decreased than guaranteed specification.



7. Maintenance and Inspection

7.1 Routine Inspection

Check periodically that ALARM signal is not output on the LCD controller or remote output. When the WARNING/ALARM display appears, take action in accordance with Section 10. "Troubleshooting". If the lubrication oil amount is lower than the lower limit line of the oil level gauge, supply the lubrication oil. See the section 7.3 "Lubrication oil" when adding the oil.



DANGER

Switch off the power supply to the pump first and lockout and disconnect the power supply connector before you start on maintenance.

$/! \setminus$ WARNING

The pump and exhaust piping will remain at a high temperature during operation and for a short time after the pump has stopped. Be sure to avoid contact and keep inflammable substances out of reach. Do not remove the outer cover during operation.

Table 7.1 Typical check items

7,000						
No.	Item	How to check	Interval (recommended)			
1	Motor Current	LCD				
2	N2 Gas Flow (EV-S**P/EV-S**N)	LCD				
3	Vibration / Noise		1 time/week			
4	Cooling water flow	LCD				
5	Pump casing Temp.	LCD				
6	Color of lubricating oil	Visual	1 time/month			

Even when the cause of the WARNING/ALARM signal has been removed the signal will be maintained until the RESET signal is entered. After you have taken the remedial action, press the RESET button on the controller or enter the RESET signal from the control signal connector to reset the WARNING.



/!\ CAUTION

The pump will not stop when an WARNING signal is generated. When pump operation is continued in this condition an ALARM signal will be generated or a serious breakdown will occur. Be sure therefore to check the pump in accordance with the instructions of Section 10. "Troubleshooting" before the pump stops for ALARM.



/i\

CAUTION

When a ALARM signal has been generated in the REMOTE operating mode, do not start the maintenance tasks until you have interrupted the external start signal. When the external ALTERNATE start signal input is maintained, the pump will start while the ALARM is being reset.

If any abnormal symptoms other than those displayed on the LCD controller appear, take action in accordance with the instruction of Section 10. "Troubleshooting".

When the BZ.OFF button is pressed in the BUZZER Enable mode, the buzzer will stop even during a warning status.

7.2 Vacuum and Exhaust Piping



$^{\prime !}ackslash$ WARNING

Maintenance on the vacuum and exhaust piping shall be performed by taking proper action to avoid the dispersion of inflammable, toxic and/or hazardous substances and to prevent physical contact with, and absorption of, these substances.



$/! \setminus$ WARNING

The pump and exhaust piping will remain at a high temperature during operation and for a short time after the pump has stopped. Be sure to avoid contact and keep inflammable substances out of reach. Do not remove the outer cover during operation.



[']!∖ WARNING

Be sure to check for gas leaks after you have finished pipe maintenance work.

Be sure to following the instructions below when carrying out maintenance work on the vacuum and exhaust piping of the pump.

- (1) Before you remove and wash the piping be sure to purge with a sufficient volume of N2 gas.
- (2) When an exhaust gas scrubber unit is used, close the inlet valve of the exhaust gas scrubber after the N2 gas purge has been discontinued and then remove the piping.
- (3) Be sure to switch off the power supply.
- (4) After you have washed the piping do not reconnect until it has dried completely.



7.3 Lubricating Oil

If the oil level is lower than the lower limit line of the oil level gauge in typical check and maintenance, supply the oil is needed.

Follow the steps below to supply the oil.

(1) Stop the pump and remove the closing board (LCD connector side) on the pump. (See Figs. 7.1)

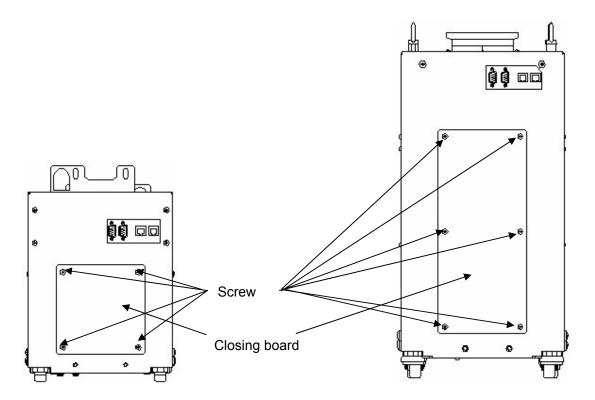


Fig. 7.1 How to remove closing board

- (2) After you have waited until the internal pump pressure returns to atmospheric (normal) pressure, remove the plug from the oil-filler inlet. (See Figs. 7.2)
- (3) Check the level through the window of the oil level gauge. Then, add the oil so that the level is between the upper and lower limit lines (see Figs. 7.2 and 7.3).
- (4) After you have checked that there are no depositions and fragments adhering to the O ring attached to the plug, close the oil-filler inlet.
- (5) Please check the air leak after supplying lubricating oil.



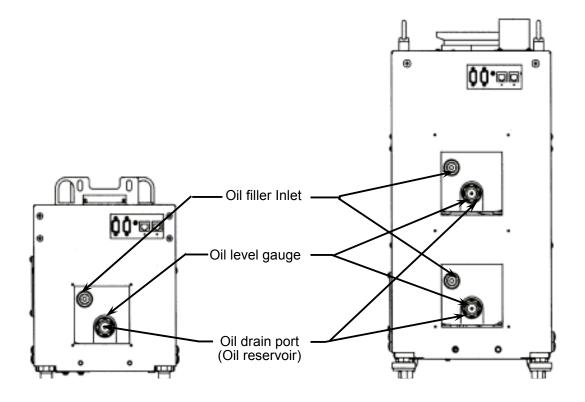


Fig. 7.2 Oil filler inlet, oil level gauge, and oil drain port positions




Fig. 7.3 Oil Level Gauge



/ CAUTION

Be sure only to use the lubricant oils listed in specification table 3.1.

Note

Waste oil shall be disposed of by industrial waste disposal dealer in accordance with Material Safety Data sheets. (appendix1)





/ CAUTION

When the lubrication oil level exceeds the upper limit, the oil may leak to the pump side. Thus, be sure no to exceed the upper limit line when adding the oil.

/ CAUTION

When the lubrication oil level is lower than the lower limit line, serious failure may be caused. If you find out the shortage, add the oil immediately.



7.4 Spare (Maintenance) Parts List

Following parts are needed for maintenance in customers' site.

Table. 8.2 Spare parts list

1. Standard consumption Part.

Parts' Name	Туре	Part No.
Ruburicant oil	BARRIERTA J100ES	C-0402-000-0111

2. Recommendable Spare Parts (Not needed for each pump.)

Parts' Name	Туре	Part No.
Oil level gauge		C-5350-000-7900
Water flow sensor	10 L/min	C-5138-107-0001
N2 flow sensor	84.4 Pa m3/s	C-5300-000-5300
T/C bolt	T TYPE, M8	C-1019-121-0001
N2 gas pressure regulator	R31-200-C121	C-2300-000-3400
Main Fuse (EV-S20)	15A	C-5500-000-6000
Main Fuse (EV-S50/100/200)	20A	C-5500-000-6100

Following labels are attached to pump covers. When they are hard to read for discoloring or peeling off, please stick them again as directed.

Table 8.3 Labels

	Label's Name	Parts No.
[DANGER]	HAZARDOUS WEIGHT DANGER LABEL	C-7110-316-0001
[WARNING]	HAZARDOUS VOLTAGE WARNING LABEL	C-7110-313-0001
[WARNING]	HIGH TEMPERATURE WARNING LABEL	C-7110-312-0001
[WARNING]	HAZARDOUS MATERIAL WARNING LABEL	C-7110-314-0001
[CAUTION]	CHARGE MARK LABEL	C-7110-315-0001



7.5 Overhaul

Some parts used in the EV-S dry pumps are consumables. Overhauls including periodical component replacement and inspections ensure safe and high-performance pump operations. The overhauls require well-trained personnel who have up-to-date knowledge of the pump structure and are familiar with hazardous chemical gases and safe work procedures. Factories where the overhauls are conducted must be equipped with special tools and facilities as well as exhaust air ducts to protect against toxic gas hazards. Ebara-designated overhaul factories provide services with well-trained personnel and relevant facilities supported by an established supply system of up-to-date pump information and genuine brand name parts. These advantages offer users superior overhaul services for the pumps in various states.

Ebara recommends the users to send the pumps for the periodical overhaul to the Ebaradesignated factories. These factories equip special tools, sufficient evacuation duct. Contact EBARA Sales office or Overhaul service center for detail.

To avoid dangers potentially encountered during pump overhauls, follow instructions below to send your pump to an Ebara-designated factory for overhaul or repair.

Fill all necessary items in a form shown in Appendix 3 and fax it in advance to Ebara Service Center or one of the agents listed in Section 11 of this manual. Ask Ebara service center for latest form. The original copy must accompany the pump you send. Failure to meet these requirements may restrict Ebara from providing any overhaul services to avoid associated risks.

When you send back the pump to service center in the United States, contact Ebara Service Center first to obtain a RMA number for identification. Enter this RMA number to an Environmental Health & Safety Clearance Form shown in Appendix 4. Ask Ebara Service Center for latest form. Then, fax it in advance to Ebara Service Center and attach its original copy to the pump you send. Be sure to take these prior actions; otherwise Ebara refuses any overhaul services to avoid associated risks.



8. Disconnection and Transportation



WARNING

When the pump has been used for exhausting highly toxic gases such as arsenic and mercury compounds, be sure to contact EBARA Corporation before you return the pump. Refer to Appendix 3 and 4 for the format required when customer returns their pump to Ebara service center for overhaul or rebuild.

/!\ CAUTION

In the interest of safety during the transportation, disassembly and cleaning of the pump, be sure to take note of the gases that have been handled.

Toxic gases may be generated from by-products in the piping or pump in pump disconnection from the tool piping for repair and replacement or flange removal for maintenance. Gain relevant information about the process gases from your tool suppliers, and be sure that the gas concentrations in the work areas are at quarter or under the acceptable values specified using appropriate measurement equipment.

Without assurance of gas safety, instruct the workers to wear proper personnel protective equipment if necessary to protect them from gas hazards. The personnel protective equipment must include at least gloves, safety goggles, and a gas mask.

To disconnect and transport the pump, proceed as follows.

- (1) Stop the pump and replace all gases inside the pump by purging them with N2 gas.
- (2) Turn off the power supply to the pump and unplug the power and signal cables.
- (3) After you have fully closed the N2 regulator, remove the N2 pipe, seal off the N2 purge port with a sealing flange.
- (4) Remove the cooling water pipes.
- (5) Remove the vacuum and exhaust pipes and completely seal off the inlet and exhaust ports of the pump with a blind flange or similar seal. Seal off all process gas discharge points such as the differential port by using a blind flange.
- (6) Attach the LCD controller on the front panel of the control board. Fix it with the tape.
- (7) Wrap the pump in a vinyl sheet.
- (8) Use the eyebolts provided on the pump for slinging the pump to load and unload. Fasten eyebolts completely and push in until flush with the seating surface. For sling, use a wire with a length so that the slinging angle (that is, the angled subtended by the two wires) is within 60 degrees.



[∕]!\ DANGER

Do not enter the zone underneath the suspended pump.

/!\ WARNING

For lifting the pump, use only qualified operator personnel. Be sure that the wire rope and crane used for lifting the pump are in proper order and match the weight of the pump. To prevent unequal weight distribution, suspend the pump by ensuring that the slinging angle remains symmetrically centered.

- (9) When options such as an interface box are attached to the pump, be careful to avoid damage due to contact by the wire rope.
- (10) For transportation, secure the pump by lowering the adjustment feet. Place a protective cloth around the pump to avoid shock and position protective members between the outer cover and the wires in order to distribute the load of the fastening wires.



9. For SEMI S2 standard

Additional electrical parts required for compliance with SEMI standards are shown in Table 9.1. The process tool panel may provide these items or they may appear in an auxiliary control panel mounted on the pump or remotely.

SEMI standards require provision of means to isolate the pump from **all** hazardous energies. Install valves that can be locked **only in the closed position** on the nitrogen supply and water lines

These valves and the supply power disconnect must be within sight of the pump, readily identifiable and provided with permanent means for locking in the "off" position only. These items and the EMO switch must be adjacent to the pump (within 3m [10 feet]) and readily accessible to the operator without serious risk of tripping or falling or coming into contact with energized electrical parts, moving machinery, high-temperature surfaces or objects, or other hazardous equipment.

See Section 2.4 regarding utility disconnection.

If safe operation requires dilution of the process gases, the installation must provide a normally open (i.e. open-on-low-flow) switched flow meter or other device tied to an external contactor that interrupts supply power to the pump when the nitrogen flow switch opens.

Table 9.1 Necessary parts for SEMI S2 standard

Parts name	Conditions
Overcurrent Protection CB (Circuit Breaker) or	Coordinate Short Circuit Current Rating (SCCR) and current limiting capacity of the circuit breaker or fuse set with the pump SCCR and
Fuses	the facility electrical distribution system.
EMO (Emergency Off)	Interrupt the power supply to the pump when EMO operates.
Nitrogen Dilution	Supply as needed for toxic or flammable gases. See Appendix 5.



10. Troubleshooting



DANGER

Interrupt Circuit Protector (CP) before starting on wiring and maintenance work. Do not switch on the power supply to the pump until work is completed.



WARNING

The pump casing and exhaust piping become extremely hot during operation and for some time after stopping. Be sure that pump and exhaust piping do not come in contact with humans or inflammable substances. Do not remove the pump cover during operation.



WARNING

Check for gas leaks after installing and maintaining the piping. Gas leaks will result in the discharge of harmful and dangerous substances and in abnormal reactions due to the ingress of air into the pump.



10.1 Troubleshooting (1) Basic trouble

Abnormal symptom	Check Item	Corrective Action
Main fuse interruption	Incorrect wiring	Check wiring.
man 1400 intorruption	Short circuit	Replace or overhaul pump.
Nothing appears on LCD	No power supply to pump.	Check power supply.
3 - 17 - 1	Connector is not connected.	Connect power connector.
	Main fuse is interrupted.	Check main fuse.
	Disconnection of the LCD's connector	Connect LCD's connector
	Instrument failure	Replace instruments.
MP does not start when applying START button.	"Remote" or "COM" mode has been selected.	Set switch to "Local" mode.
	Start-up conditions are not satisfied. ("Startfail" is displayed.)	Satisfy all start-up conditions.
	Instrument failure	Replace instruments.
MP does not start when entering external "MP start"	"Local" or "COM" mode has been selected.	Set switch to "Remote".
signal input.	Start-up conditions are not satisfied. ("Startfail" is displayed.)	Satisfy all start-up conditions.
	Instrument failure	Replace instruments.
BP does not start.	BP start signal is not entered in "REMOTE" or "COM" mode.	Enter the start signal.
	Instrument failure	Replace Instruments.
Abnormal noise	Adjustment feet are not applied.	Use the adjustment feet.
Excessive vibration	Some object is making contact with the outer cover.	Remove the object.
	The fastening screws of the outer cover have worked themselves loose.	Tighten the fastening screws.
	Parts of the pump are damaged.	Replace or overhaul pump.
Vacuum pressure increase.	Accumulation of by-products in pipes.	Clean piping.
	N2 pressure setting is high.	Set pressure for correct value.
	Leak from vacuum piping.	Check piping.
	Accumulation of by-products in pumps.	Replace or overhaul pump.
MEMORY ERROR is displayed on LCD.	None	Need "Countermeasure against electric Noise" to pump.



10.2 Troubleshooting (2) WARNING

Display	Symptom	Check Item	Corrective Action
WARN: WATER	Water flow is reduced.	Coupler is disconnected.	Connect coupler.
FLOW LOW		Pressure is not sufficient.	Apply sufficient pressure.
		Root valve is closed.	Open valve.
		Water pipe is clogged.	Clean or replace piping.
		Tube fittings are loosened.	Re-tighten.
		Instrument failure	Replace instrument.
		Outlet & inlet pipes are reverse. (flow value 0 L/min)	Connect pipes correctly.
WARN: PUMP N2	Pump N2 flow is	N2 port is not connected.	Connect N2 pipe fitting.
FLOW LOW	reduced.	Primary pressure is insufficient.	Apply sufficient pressure.
		Regulator setting value LOW.	Increase pressure setting.
		N2 pipe is clogged.	Replace N2 piping.
		Leaks on N2 pipe.	Check the fittings.
		Instrument failure	Replace instrument.
WARN: CASING	Casing temperature	Pump back pressure rises.	Check exhaust pipe
TEMP HIGH	rises.	Increase of the gas load.	Reduce the inflow gas amount.
		Accumulation of by-product	Replace or overhaul pump.
		Cooling water flow is reduced.	Increase cooling water flow.
WARN: BP MOTOR TEMP HIGH	Booster pump (BP) motor coil temp. rises.	Cooling water flow is reduced.	Cool pump thoroughly and reset.
WARN: MP MOTOR TEMP HIGH	Main pump (MP) motor coil temp. rises.	Motor failure	Replace or overhaul pump.
WARN: BP DRIVER TEMP HIGH #### WARN: MP DRIVER TEMP HIGH ####	Booster pump (BP) driver temp. rises. Main pump (MP) driver temp. rises.	Cooling water flow is reduced.	Increase cooling water flow.
WARN:	Communication is not	Connection error of the	Check the connection of the
## COMM.ERROR	established.	instrumented units	instrumented unit.
MARK BUMB BOX	ļ	Instrument failure	Replace instrument.
WARN: PUMP BOX TEMP HIGH	Temp. rises in pump cover.	Cooling water flow is reduced.	Increase cooling water flow.
		The ambient temperature is high.	Confirm the ambient temperature (less than 30°C).

After you have taken the remedial actions above, reset the pump. If the problem that has caused the WARNING signal still remains, the WARNING display will appear again even after you have reset.



10.3 Troubleshooting (3) ALARM

Display	Symptom	Check Item	Corrective Action
ALARM: WATER	Water flow is reduced.	Coupler is disconnected.	Connect coupler.
FLOW LOW		Pressure is not sufficient.	Apply sufficient pressure.
		Root valve is closed.	Open valve.
		Water pipe is clogged.	Clean or replace piping.
		Tube fittings are loosened.	Re-tighten.
		Instrument failure	Replace instrument.
		Outlet & inlet pipes are reverse. (flow value 0	Connect pipes correctly.
AL ADMA CACINIC	Dunan analisas tamas	L/min)	Ob a all and a seat aring
ALARM: CASING TEMP H.HIGH	Pump casing temp. rises.	Pump back press. rises.	Check exhaust pipe.
TEIVIE TI.TIIGIT	11363.	Increase of the gas load.	Reduce the inflow gas amount.
		Cooling water flow is reduced.	Cool pump thoroughly and reset.
		Accumulation of by- products	Replace or overhaul pump.
ALARM:BP MOTOR TEMP H.HIGH	Booster Pump (BP) motor coil temp. rises.	Cooling water flow is reduced.	Cool pump thoroughly and reset.
ALARM:MP MOTOR TEMP H.HIGH	Main Pump (MP) motor coil temp. rises.	Motor failure	Replace or overhaul pump.
ALARM:BP MOTOR	BP motor current rises.	Pump back press. rises.	Check exhaust pipe & silencer.
OVERLOAD 2		Increase of the gas load.	Reduce the inflow gas amount.
ALARM:MP MOTOR OVERLOAD 2	MP motor current rises.	Rotor makes contact. (Accumulation of by- products) (Substance plunge)	Replace or overhaul pump.
		Instrument failure	Replace instrument.
ALARM:BP MOTOR	Booster Pump (BP)	Pump back press. rises.	Check exhaust pipe.
STEP OUT	motor step out.	Increase of the gas load.	Reduce the inflow gas amount.
ALARM:MP MOTOR STEP OUT	Main Pump (MP) motor step out.	Rotor makes contact. (Accumulation of by- products) (Substance plunge)	Replace or overhaul pump.
	Can not restart.	Instrument failure	Replace instrument.
ALARM:	BP Motor driver	Pump back press. rises.	Check exhaust pipe.
BP DRIVER ###	protection	Increase of the gas load.	Reduce the inflow gas amount.
ALARM: MP DRIVER ###	MP Motor driver protection	Rotor makes contact. (Accumulation of by- products) (Substance plunge)	Replace or overhaul pump.
	Can not restart	Cooling water flow rate is reduced.	Cool pump thoroughly and reset.
		Motor driver has broken down.	Replace motor driver.
ALARM:	Open phase	Instrument failure	Replace instrument.
PHASE ERROR		Incorrect wiring	Check power supply
ALARM:STARTFAIL	Start fault	Starting during WARNING/ALARM status	Make sure that all starting conditions are met.
ALARM/WARN EXIST			

After you have taken the remedial actions above, reset the pump. If the problem that has caused the WARNING signal still remains, the WARNING display will appear again even after you have reset.



10.4 Troubleshooting (4) Option

1014 Troublecting (4) Option					
Display	Symptom	Check Item	Corrective Action		
ALARM:	Water leakage	Tube fittings are loosened.	Re-tighten.		
WATER LEAKAGE		Instrument failure	Replace instrument.		
ALARM:	Exhaust pressure	Exhaust valve is closed.	Check exhaust pipe.		
BACK PRESS.HIGH	rises.	Accumulation of by-products in pipes.	Check exhaust pipe.		
		Instruments failure	Replace instruments.		
WARN:	Exhaust pressure	Exhaust valve is closed.	Check exhaust pipe.		
PRESS.HIGH ##.#	rises.	Accumulation of by-products in pipes.	Check exhaust pipe.		
		Instruments failure	Replace instruments.		
ALARM: EMERGENCY STOP	Emergency Stop switch	Stop by emergency Stop button.	Check that pump can be operated and turn the button head to release lock.		

After you have taken the remedial actions above, reset the pump. If the problem that has caused the ALARM signal still remains, the ALARM display will appear again even after you have reset.



11. Inquiries

For all inquiries and queries in connections with any of the details given in this Operating Instruction Manual and/or the pump in general, please contact EBARA Corporation directly after checking the pump type and unit number.

11.1 North America

EBARA TECHNOLOGIES INCORPORATED

(1) Western Region CALIFORNIA

Headquarters

51 Main Avenue,

Sacramento, CA 95838, U.S.A.

Phone: (916) 920-5451 Fax: (916) 925-6654

Silicon Valley Operations

45 Plumeria Drive,

San Jose, CA 95134-2103, U.S.A.

Phone: (408) 934-2888 Fax: (408) 934-2801

(2) Eastern Region VIRGINIA

10342 Battleview Parkway, Manassas, VA 20109, U.S.A.

Phone: (703) 392-4286 Fax: (703) 330-9708

(3) Southwest Region TEXAS

8201-6 E. Riverside Drive, Suite 600

Austin, TX 78744, U.S.A.

Phone: (512) 389-3993 Fax: (512) 389-3995



11.2 Asia

(1) Japan EBARA CORPORATION

1-6-34 KOUNAN, MINATO-KU, TOKYO 108-8480, JAPAN

Phone: (03)5461-4033 Fax: (03)5461-6009

(2) Korea EBARA PRECISION MACHINERY KOREA INC.

15 FL, KANGNAM BLDG. 1321SEOCHO-DONG, SEOCHO-KU,

SEOUL, KOREA

Phone: 02-581-6901~5 Fax: 02-581-4211

(3) Taiwan TAIWAN EBARA DENSAN (TED)

NO.7 NAN YUEN 2ND ROAD CHUNGLI TAO YUEN, TAIWAN, R.O.C.

Phone: 03 4522181 Fax: 03 4522186

EBARA PRECISION MACHINERY TAIWAN INC.

EBARA CORPORATION, TAIPEI OFFICE

ROOM 1402, CHIA HSIN BLDG, No.96 SEC 2, CHUNG SHAN N RD.,

TAIPEI TAIWAN. R.O.C.

Phone: 02-2560-1166 Fax: 02-2560-1177

(4) Singapore EBARA ENGINEERING SINGAPORE (E.E.S.)

NO.1 TUAS LINK2 SINGAPORE. 638550

Phone: 862-3536 Fax: 861-0589



11.3 EUROPE

(1) U.K. EBARA CORPORATION SCOTLAND BRANCH (EBARA SCOTLAND)

3. ADAM SQUARE-BRUCEFIELD INDUSTRIAL ESTATE LIVINGSTON.

SCOTLAND. U.K

Phone: 1506-460232 Fax: 1506-460222

(2) Germany EBARA TECHNOLOGIES INCORPORATED (CRYO PUMP OPERATION)

44 JARMUIDEN. AMSTERDAM. NETHERLAND

Phone: 20-611-4345 Fax: 20-611-4375

EBARA GERMANY GmbH

DONAU STRASSE 7, D-63452 HANAU. GERMANY

Phone: 06181-1876-0 Fax: 06181-1876-40



APPENDIX

- 1. Material Safety Data Sheet of Lubricant oil
- 2. Material Safety Data Sheet of Lithium Battery
- 3. Overhaul/Repair Request form
- 4. Overhaul/Repair Request form in United States
- 5. Information of typical hazardous materials
- 6. Leak Check procedure

Appendix 1 Material safety Data Sheet of Lubricant. (5pages)

Material Safety Data Sheet

Product name: BARRIERTA J100ES Date: September 10, 2002

Revision Date: September 27, 2002

MSDS No. 1863 Page 1 of 5

1. Product and company identification

Product name: BARRIERTA J100ES

Company: NOK KLÜBER CO.,LTD

955-4, Aza Ohishi, Isoharamachi, Kitaibaraki city, Ibaraki 319-1541, Japan

Telephone: +81-293-42-5365

Fax: +81-293-43-3817

2. Composition/information on ingredients

Chemical names and synonyms: Fluorinated lubricating oil

CAS No. Components Value

Perfluoropolyether >95wt%

Additives <5wt%

Hazardous ingredients:

3. Hazardous identification

>280°C traces of fluorinated products

Some materials (e.g. titanium, aluminum or alloys of these materials) may cause lower decomposition temperatures.

Prolonged skin contact may cause skin irritation and/or dermatitis.

4. First aid measures

After inhalation

Remove victim to fresh air. If symptoms persist, call a physician.

After contact with skin

Wash off with mild cleaners and plenty of water. If symptoms persist, call a physician.

After contact with eyes

Rinse with plenty of water. If symptoms persist, call a physician.

After ingestion

If large amounts are swallowed, do not induce vomiting. Obtain medical attention.

Product name: BARRIERTA J100ES

MSDS No. 1863 Page 2 of 5

5. Fire-fighting measures

Suitable extinguishing media

The product itself does not burn. Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.

Special hazards

In case of fire the following can be released: traces of fluorinated products

Special protective equipment for firefighters

Standard procedure for chemical fires.

Additional information

Water mist may be used to cool closed containers. In the event of the fire and/or explosion do not breathe fumes.

6. Accidental release measures

Personal precautions

Risk of slipping due to leakage/spillage of product.

Environmental precautions

Do not flush into surface water or sanitary sewer system.

Methods for cleaning up/taking up

Use mechanical handling equipment. Dispose of absorbed material in accordance with the regulations.

7. Handling and storage

Handling

Advice on safe handling

No special handling advice required.

Advice on protection against fire and explosion

No special precautions required.

Storage

Requirements on storage conditions

Store at room temperature in the original container.

Incompatible materials

Do not store together with food.

Product name: BARRIERTA J100ES

MSDS No. 1863 Page 3 of 5

8. Exposure controls/personal protection

Additional advice on system design

not applicable

Ingredients and specific control parameters

None

Personal protective equipment

Respiratory protection

No special protective equipment required.

Hand protection

Wear chemical-resistant gloves.

Eye protection

Wear safety glasses. Do not wear contact lenses when working with chemicals.

Body protection

Wear clean, body-covering clothing to minimize dermal exposure.

General protection and hygiene measures

Avoid prolonged and/or repeated contact with skin. Remove soiled or soaked clothing immediately. Clean skin thoroughly after work; apply skin cream. Keep away from tobacco products.

9. Physical and chemical properties

Form: liquid

Color: colorless

Odor: none

Density: approx. 1.89 g/cm³,20°C

Flash point: none °C

Ignition temperature: not applicable °C

Lower explosion limit: not applicable

Upper explosion limit: not applicable

Water solubility: insoluble

Vapor pressure: approx. 6.5E-5Pa (20°C)

Product name: BARRIERTA J100ES

MSDS No. 1863 Page 4of 5

10. Stability and reactivity

Stability

Stable

Conditions to avoid

None

Materials to avoid

Strong bases, alkali metals, alkaline earth metals, Lewis acids

Hazardous decomposition products

>280°C traces of fluorinated products

Additional information

None

11. Toxicological information

The toxicological data has been taken from products of similar composition.

Acute toxicity: LD50/

LD50/oral/rat=>37.4g/kg(literature data)

Prolonged skin contact may cause skin irritation and/or dermatitis.

12. Ecological information

Information on elimination (persistence and degradability)

Product is insoluble in water. May be separated out mechanically in purification plants.

Behavior in environmental compartments

Ecological injuries are not known or expected under normal use.

Ecotoxic effects

Aquatic toxicity is unlikely due to low solubility.

Additional information

Should not be released into the environment.

13. Disposal considerations

This product can be incinerated when in compliance with local, state and federal regulations.

This product contains halogen.

Offer rinsed packaging material to local recycling facilities.

Product name:	BARRIERTA J100ES	
MSDS No. 18	63	Page 5 of 5
14. Transport	t information	
UN alasa i		
UN class :	not applicable	
UN No.:	not applicable	
Advice on tra	nsportation	
Not classified	as dangerous in the meaning of transport regulations.	
15. Regulator	ry information	
16. Other info	ormation	
knowledge, info only as a guida release and is n to the specific n	n provided in this Material Safety Data Sheet is correct to the best of our primation and belief at the date of its publication. The information given nce for safe handling, use, processing, storage, transportation, dispose to the considered a warranty or quality specification. The information material designated and may not be valid if the material is used in combrials or if it is processed, unless specified in the text.	is designed al and relates only

Appendix 2 Material Safety Data Sheet for Lithium battery. (2 pages)

U. S. Department of Labor

Material Safety Data Sheet

May be used to comply with Occupational Safety and Health Administration OSHA's Hazard Communication Standard. (Non-Mandatory Form) 29 CFR 1910, 1200, Standard must be Form Approved consulted for specific requirements. OMB No.1218-0072 IDENTITY (As Used on Label and List) Note: Blank spaces are not permitted, if any item is not applicable, or no information is available, the space must be marked to indicate that. Lithium/Thionyl Chloride Battery (ER3V) Section I Manufacture's Name Emergency Telephone Number TOSHIBA BATTERY CO.,LTD. Address (Number. Street. City. State. and ZIP Code) Telephone Number for Information TOKYO 03-5479-8237 Date Prepared 4-10. MINAMI-SHINAGAWA 3-CHOME, 24-March-2003 Signature of Prepare (optional) SHINAGAWA-KU, TOKYO 140-004, JAPAN Section II - Hazardous ingredients / Identity information Other Limits Hazardous Components (Specific Chemical Identity, Common Name(s)) OSHA PEL ACGIH TLV Recommended %(optional) The following chemical contents are enclosed in strong stainless-steel can and hermetically sealed. 1) Lithium Metal 0.31g/Cell 3.7% 2) Thionyl chloride (Electrolyte) 41.2% Battery Weight 8.5g / Cell * This battery is installed with safety vent. Section III - Physical / Chemical Characteristics **Bolling Point** Specific Gravity (H₂O=1) N/A 2.175 Vapor Pressure (mm Hg) Melting Point 179°C N/A Lithium Metal (The content) Vapor Density (AIR=1) **Evaporation Rate** N/A (Butyl Acetate = 1) N/A Solubility in Water N/A Appearance and Odor * Cylindrical - Shape, Odoriess. Section IV- Fire and Explosion Hazard Data VEL Flash Point (Method Used) Flammable Limits N/A Extinguishing Media * Pouring Water against bare Lithium Metal is prohibited. Special Fire Fighting Procedures * Sand and / or large quantity of water. Unusual Fire and Explosion Hazards * Combustible at the conditions of abnormally high temperature and or in the fire with safety vent being operated and gas being flown out. * Keeping under 212. F is required (UL) OSHA 174, Sept. 1985 (Reproduce locally)

Section V-React	tivity Data			-		
Stability	Unstable		Conditions to Avoi			·
	Stable		Never short-ci	rcuit, pouring wa	ter of sea water, and h	eat.
		×				
Incompatibility (Materials	to Avoid)		* Never put ca	utone in water		
Hazardous Decompositio	n or Byproducts		NOVOI put co	atona in water.		
T2				if handle with car	ė.	
Hazardous Polymerization	May Occur		Conditions to Avoi	NONE		
	Will Not Occur	V				
SectionVI- Health	Honord Boto	*** C**	the liquid will a		dealer and	-
Route(s) of Entry	Inhalation?	Şuniule	ative liquid will o	ome out when	ingestion?	
* SO2 and	HCI gas will come out whe	n destroyed.			-	ut in mouth.
Health Hazards (Acute a	nd Chronic)					J
(If destroye	ed) * Inhalation of SO2 and	HCI gas infl	ames respiratory	organs.		
(Acute) * In	nflames eyes and skin (Acı	ıte)				
* Evenent	ely stimulate the mucous n	ambrono of	the mouth and the	mat		
Carcinogenicity:	NTP?	SOUTH STILL CH	IARC Monograp		OSHA Regulated?	
		Unknown		Unknown		Unknown
Signs and Symptoms of I	•					
Medical Conditions	* Inflames of s	ores, if touch	ned SO2 gas of S	OCI2.		
Generally Aggravated by	Exposure					
	4 Old- 1-8		*!!	I mile &		
Emergency and First Aid	* Skin Inflammation hard of Procedures	cougn.	* Loss of eyes	ignt.		
	1					
	* Wash with clean water.	,				
Section VI- Preca	utions for Safe Hand	dling and	Use			
	e Material is Released or Spi	_				
	* Wash out with large qua	intity of water	r			
	* Dietinguish fire if logited	1				
Waste Disposal Method	* Distinguish fire if ignited					
	* Dispose of according to	appropriate i	ocal, state and Fe	ederal waste regu	Mations.	
Precautions to Be Taken						
	* Keep unused cells in a d	ool and dry p	DIACE.			
	* Do not short or heat.					
Other Precautions	* Do not dispose of in fire		and the second of the second of			
						1.1
O	* Do not disassemble nor	destroy.				
Section W - Contro Respiratory Protection (S						
maspiratory Protection (a	Anti-Sulfurous acid gas (h	f cells are de	stroyed) under no	rmal use and cor	nditions.	
Ventilation	Local Exhaust	N/A		Special	N/A	
	Mechanical (General)	19/0		Other	IVA	
Durkasii in Ci	. ,	N/A	IS 5	<u> </u>	N/A	
Protective Gloves * To be use	ed under abnormal condition	ons.	Eye Protection	* To be used un	der abnormal condition	ns.
Other Protective Clothing						
Work/Hyglenic Practices		N/A				
		N/A				
			Page 2		*USGPO 1986	6-491-529/45775

Appendix 3

Overhaul/Repair Request form

To avoid dangers potentially encountered during pump overhauls, follow instructions below to send your pump to an Ebara-designated factory for overhaul or repair.

Fill all necessary items in a form shown in next page, and fax it in advance to Ebara Service Center or one of the agents listed in Section 11 of this manual. The original copy must accompany the pump you send.

Failure to meet these requirements may restrict Ebara from providing any overhaul services to avoid associated risks.

エバラドライ真空ポンプ オーバーホール依頼書

行 部署名: TEL No. 御氏名: FAX No. 御住所: TEL: * 当社営業担当宛にFAX後ボンブに添付の上 FAX: 御返却下さい。 E-mail: お願い 弊社における、作業(分解、洗浄など)の人的安全および環境安全の確保のため、弊社の製品を御返却の際は、お手数ですが、必ずこの用紙で弊社に御連絡頂き、製品に添付して下さい。 費社注文書番号、整理番号など: 1. ポンブ処名 2. ポンブシリアル番号 3. 付展品の有無 □無 □有(具体的に) 4. 装置名 (装置メーカー名) (装置モデル名) 5. プロ込名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ LLなど □ その他() **エンチング、して等でも、As (上業)を排出する可能性のある場合は、As排出と明記してください。 6. 使用が X名 *As (上案)等、有事性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい、明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. **ソフ・停止時の状況 9. 運転期間 年月日 年月日 10. オーパーネール後の状態 □ 現状仕様 □改造(手直し)希望() 11. 御返却ロノ 月取り希望日 年月日 年前 午後 御希望納別 * 予備機の有無 (有 、無) 13. 備考	宛先:		貴社名:	
FAX No.		行	部署名:	
TEL: *当社営業担当宛にFAX後ポンプに添付の上 FAX: 御返却下さい。 E-mail: お願い 弊社における、作業(分解、洗浄など)の人的安全および環境安全の確保のため、弊 社の製品を御返却の際は、お手数ですが、必ずこの用紙で弊社に御連絡頂き、製品に 添付して下さい。 責社注文書番号、整理番号など: 1. ポンプ機名 2. ポンプシリアル番号 3. 付屋品の有無 □無 □有(具体的に) 4. 装置名 (装置メーカー名) (装置モデル名) 5. プロス名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他() *エッテング、L/し等でも、As (比素)を排出する可能性のある場合は、As排出と明記してください。 *Cooper (類) 汚染が有る場合は富実に相談してください。 6. 使用がス名 *As (比素)等、有害性のガスを使用されている場合は必ず明記し、ポンプの吸持気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ・停止時の状況 9. 運転期間 年月日~年月日 10. オーハ・オール後の状態 □現状仕様 □改造(手直し)希望() 11. 御返却日/ 引取り希望日 年月日午前午後 御希望納期 年月日午前午後	TEL No.		御氏名:	
* 当社営業担当宛にFAX後ポンプに添付の上 FAX : 御返却下さい。	FAX No.		御住所:	
## ## ## ## ## ## ## ## ## ## ## ## ##			TEL :	
お願い 弊社における、作業 (分解、洗浄など) の人的安全および環境安全の確保のため、弊社の製品を御返却の際は、お手数ですが、必ずこの用紙で弊社に御連絡頂き、製品に添付して下さい。 貴社注文書番号、整理番号など: 1. ボンブ機名 2. ボンブシリアル番号 3. 付属品の有無	* 当社営業担当宛にFAX	後ポンプに添付の上	FAX :	
弊社における、作業(分解、洗浄など)の人的安全および環境安全の確保のため、弊社の製品を御返却の際は、お手数ですが、必ずこの用紙で弊社に御連絡頂き、製品に添付して下さい。 遺社注文書番号、整理番号など: 1. ポンプ機名 2. ポンプシリアル番号 3. 付属品の有無 □無□有(具体的に) 4. 装置名 (装置メーカー名) (装置メーカー名) (装置モデル名) 5. 7 叶X名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他(**エッチング・L/ L等でも、As (比素)を排出する可能性のある場合は、As排出と明記してください。*Copper (鋼) 汚彙が有る場合は営業に相談してください。*Copper (鋼) 汚彙が有る場合は営業に相談してください。 6. 使用が X名 *As (比素) 等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 *A すっ 月 日 8. 本 ソフ 停止時の状況 中 月 日 9. 運転期間 年 月 日 年 月 日 10. オーハ・オール後の状態 □ 現状仕様 □改造 (手直し) 希望 () 11. 御返却日/引取り希望日 年 月 日 午前 午後 12. オーバ・オール 御希望納期 * 予備機の有無 (有 、無)	御返却下さい。		E-mail:	
社の製品を御返却の際は、お手数ですが、必ずこの用紙で弊社に御連絡頂き、製品に添付して下さい。 責社注文書番号、整理番号など: ボンブ機名				
添付して下さい。 貴社注文書番号、整理番号など: 1. ポンプ機名 2. ポンプシリアル番号 3. 付属品の有無 □無 □有(具体的に) 4. 装置名 (装置モデル名) 5. 7 Pt7名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ NETAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他(**エッチング、しくしゃでも、As (ヒ素)を排出する可能性のある場合は、As排出と明記してください。*Copper (鎖) 汚染が有る場合は営業に相談してください。*Copper (鎖) 汚染が有る場合は営業に相談してください。 6. 使用が 3名 *As (ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかわます。 7. 電圧・周波数 *As (レ素)等、有毒性の対スを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかわます。 9. 運転期間 年月日 9. 運転期間 年月日 年月日 年月日 10. オーバーホール後の状態 □現状仕様 □改造(手直し)希望() 11. 御返却日/引取り希望日 年月日午前午後 4 予備機の有無(有未)無)	弊社における、作業(分解、洗浄など)の	人的安全および環境安全の確保の	ため、弊
貴社注文書番号、整理番号など: 1. ポンプ機名 2. ポンプシリアル番号 3. 付属品の有無 □無 □有(具体的に) 4. 装置名 (装置メーカー名) (装置モデル名) 5. 7 ロセス名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他 () (* エッチング、L/ L等でも、As (上来)を排出する可能性のある場合は、As排出と明記してください。 * Copper (鍋) 汚染が有る場合は営業に相談してください。 * Copper (鍋) 汚染が有る場合は営業に相談してください。 6. 使用がえ名 *As (上来) 等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、開止なき場合はお引取を致しかわます。 7. 電圧・周波数 * 本	社の製品を御返却の際	は、お手数ですが、。	公ずこの用紙で弊社に御連絡頂き	、製品に
ボンブ機名	添付して下さい。			
ボンブ機名				
2. ポンプシリアル番号 3. 付属品の有無 □無 □有(具体的に) 4. 装置名 (装置メーカー名) (装置モデル名) 5. プロス名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他 (* エッチング、 L/L等でも、As (ヒ素)を排出する可能性のある場合は、As排出と明記してください。 * Copper (銅) 汚染が有る場合は営業に相談してください。 * Copper (銅) 汚染が有る場合は営業に相談してください。 * Copper (銅) 汚染が有る場合は営業に相談してください。 * スター・ファンジを取り付けて下さい。明記なき場合、開止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ・停止時の状況 9. 運転期間 年月日 年月日 10. オーパ・オール後の状態 □現状仕様□改造(手直し)希望() 11. 御返却日/ 引取り希望日 年月日午前午後 12. オーパ・オール 御希望納期 年月日午前午後 * 予備機の有無(有、無)		号など: 		
3. 付属品の有無 □無 □有(具体的に) 4. 装置名 (装置メーカー名) (装置モデル名) 5. プロセス名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他() *エッチング、L/ L等でも、As(ヒ素)を排出する可能性のある場合は、As排出と明記してください。 *Copper (鋼) 汚染が有る場合は営業に相談してください。 6. 使用が ス名 *As(ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ・停止時の状況 9. 運転期間 年月日~年月日 10. オーパ・ホール後の状態 □現状仕様 □改造(手直し)希望() 11. 御返却日/ 引取り希望日 年月 午前 午後 12. オーパ・ホール 年月日 午前 午後 13. オーパ・ホール 年月日 午前 午後 14. 帯強約初有無(有、無))				
4. 装置名 (装置メーカー名) (装置モデル名) 5. 7 中以名 □ LP-CVD □ PE-CVD □ EPI □ MO-CVD □ ALD □ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他(
(素値ターカー名)		□無 □有(具体的に)
□ METAL-CVD □ OXIDE-ETCH □ POLY-ETCH □ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/L など □ その他 () **エッチング、L/L等でも、As(比素)を排出する可能性のある場合は、As排出と明記してください。 **Copper (銅) 汚染が有る場合は営業に相談してください。 6. 使用が ス名 *As(比素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間 年月日~年月日 10. ホーパーホール後の状態 □現状仕様 □改造(手直し)希望() 11. 御返却日/ 引取り希望日 4年月日午前午後 12. ホーパーホール 毎希望納期 4年月日午前午後 * 予備機の有無(有、無)	4. 装置名	(装置メーカー名)	(装置モデル名)	
□ ASHING □ PVD □ ION-IMPLANTOR □ SEM/METROGY □ L/Lなど □ その他(5. プロセス名	□ LP-CVD □ P	E-CVD □ EPI □ MO-CVD	□ ALD
□ L/Lなど □ その他() **エッチング、L/L等でも、As (ヒ素) を排出する可能性のある場合は、As排出と明記してください。 *Copper (銅) 汚染が有る場合は営業に相談してください。 6. 使用が ス名 *As (ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間 年 月 日 年 月 日 10. オーパーホール後の状態 □現状仕様 □改造 (手直し)希望 () 11. 御返却日/ 引取り希望日 年 月 日 午前 午後 12. オーパーホール 年 月 日 午前 午後 御希望納期 * 予備機の有無 (有 、 無)		☐ METAL-CVD ☐ C	XIDE-ETCH DPOLY-ETCH	
*エッチング、L/L等でも、AS(L素)を排出する可能性のある場合は、AS排出と明記してください。 *Copper (銅) 汚染が有る場合は営業に相談してください。 6. 使用が 2名 *AS(ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間 年月日 10. オーハ・オール後の状態 □現状仕様 □改造(手直し)希望(□現状仕様 □改造(手直し)希望(11. 御返却日/ 引取り希望日 12. オーハ・オール 年月日 午前 午後 * 予備機の有無(有、無)		☐ ASHING ☐ PVD	☐ ION-IMPLANTOR ☐ SEM/N	METROGY
ください。 *Copper (鋼) 汚染が有る場合は営業に相談してください。 6. 使用が ス名 *As (ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間 年月日 10. オーパーホール後の状態 □現状仕様 □改造 (手直し)希望 () 11. 御返却日/ 引取り希望日 年月日午前午後 12. オーパーホール 御希望納期 年月日午前午後 * 予備機の有無(有、無)		-	· . _ ·	,
 6. 使用がえ名 *As (ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間			AS (C系) を排出する可能性のある場合は、ASE	非正と明記して
*As (ヒ素)等、有毒性のガスを使用されている場合は必ず明記し、ポンプの吸排気口には閉止フランジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ・停止時の状況 9. 運転期間 年月日 日 年月日 10. オーハ・ーホール後の状態 □現状仕様 □改造(手直し)希望(□別状仕様 □改造(手直し)希望(11. 御返却日/ 引取り希望日 12. オーハ・ーホール 年月日午前午後 ※予備機の有無(有、無)		*Copper(銅)汚染が有る場	合は営業に相談してください。	
フジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間 年月日 10. オーハ・ーホール後の状態 □現状仕様□改造(手直し)希望() 11. 御返却日/引取り希望日 12. オーハ・ーホール 年月日 午前午後 御希望納期 ・ 予備機の有無(有、無)	6. 使用ガス名			
フジを取り付けて下さい。明記なき場合、閉止なき場合はお引取を致しかねます。 7. 電圧・周波数 8. ポンプ停止時の状況 9. 運転期間 年月日 10. オーハ・ーホール後の状態 □現状仕様□改造(手直し)希望() 11. 御返却日/引取り希望日 12. オーハ・ーホール 年月日 午前午後 御希望納期 ・ 予備機の有無(有、無)		 *As (ヒ素) 等。有毒性のガ	スを使用されている場合は必ず明記し、 ポンプの呼	及排気口には閉止フラ
8. ポンプ停止時の状況 9. 運転期間 年月日~年月日 10. オーバーホール後の状態 □現状仕様 □改造 (手直し) 希望 () 11. 御返却日/				
9. 運転期間 年 月 日~ 年 月 日 10. オーハ・・・・ホール後の状態 □現状仕様 □改造 (手直し) 希望 () 11. 御返却日/	7. 電圧・周波数			
10. オーバーホール後の状態 □現状仕様 □改造 (手直し) 希望 () 11. 御返却日/	8. ポンプ停止時の状況			
10. オーバーホール後の状態 □現状仕様 □改造 (手直し) 希望 () 11. 御返却日/				
11. 御返却日/ 引取り希望日 年月日午前午後 12. オーバ・オール 御希望納期 年月日午前午後 * 予備機の有無(有、無)	9. 運転期間	年 月 日	~ 年 月 日	
引取り希望日 年月日 午前 午後 12. オーバ・ホール 年月日 午前 午後 御希望納期 * 予備機の有無(有、無)	10. オーバーホール後の状態	口現状仕様 口改造(手	直し)希望()
12. オーハ・・オール 年月日午前午後 御希望納期 * 予備機の有無 (有、無)	11. 御返却日/	年 日 口	左前	
御希望納期 * 予備機の有無 (有 、 無)		+ 7 -	一一一一一一一一一一一一一一一一一一一一一一一一一一一一一	
1 MIL 1990 - 13 MIL 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			午前 午後	
13. 備考	御希望納期	* 予備機の有無 (有 、 無)	
	13. 備考			

Appendix 4

Overhaul Request form (USA)

In the United States, returned pump shipments must conform to Department of Transportation regulations:

- Hermetically seal contaminated equipment in two heavy gauge polyethylene bags or equivalent.
- Tag or label equipment stating the possible hazardous material and/or the environment in which it was used.
- Obtain an RMA number from the EBARA Service department and post on all bags, containers, and packing list along with a copy of the Environmental Health &Safety Clearance Form. See next page for sample of the form.

Be sure to take these prior actions; otherwise Ebara refuses any overhaul services to avoid associated risks.

ENVIRONMENTAL HEALTH & SAFETY CLEARANCE FORM

	EBARA TECHNOLOGIES INCORPORATED 51 MAIN AVENUE	EBARA TECHNOLOGIES 8201-6 EAST RIVERSIDE AUSTIN, TEXAS 78744 PHONE: (512) 389-3993		P.O. #:	
	SACRAMENTO, CA 95838-2014 PHONE: (916) 920-5451			RMA #:	
EBARA	FAX: (916) 920-1033 FAX: (512) 389-3995			CALL SERVICE CENTER FOR RMA #	
	AX OR MAIL A COMPLETED COPY OF THIS FO		SERVICE CENTER P	RIOR TO SHIPPING EQUIPMENT	
	PRODUCT AND CUSTOMER IDENTIFICATIO				
	SITE NAME:		MODEL NO.:		
,	ADDRESS:				
-					
	PHONE/FAX:				
]	IS THIS EQUIPMENT USED OR CONTAMINATE	D?	TOOL I.D.:		
1	IF YES, CHECK HERE	TONS 2.0, 3.0, 4.0 & 5.0	LENGTH OF SERVICE:		
]	IF NO, CHECK HERE COMPLETE SECT	TONS 4.0 & 5.0			
	PROCESS TYPE (CHECK ALL APPLICABLE)	•			
	LPCVD: □ BPSG □ BSG □ PSG □ POL PECVD: □ BPSG □ BSG □ PSG □ HDP				
1	ETCH: METAL (AI) NITRIDE C				
	MISC: COPPLIE ASHING EPI SPUTTER SPACER W-CVD			CVD PVD/	
3.0	IDENTIFICATION AND LISTING OF ALL CO				
	3.1 WAS THE EQUIPMENT USED WITH ANY O	•	•		
	3.1.1 RADIOACTIVE HAZARDS?	YES □ NO □ IF YES.	DO NOT DISPATC	H. CONTACT SERVICE CENTER	
				H. CONTACT SERVICE CENTER	
		YES NO (E.G., AF			
		YES NO (E.G., PR			
		YES NO (E.G., PR		•	
,	3.2 PLEASE LIST ALL SUBSTANCES OR BY-PR	, .	•		
	CHEMICAL NAME	CHEMICAL		IAL INSTRUCTIONS	
		SYMBOL			
Process (Gas:				
By-Prodi	uet:				
	L	<u> </u>	<u> </u>		
ļ. <u>.</u>	ATTACHED ADDITIONAL FORMS AND/OR AI		TION? YES NO	р П	
	REASON FOR RETURN OR SERVICING OF E	•			
 	4.1 BRIEFLY DESCRIBE ANY EQUIPMENT AND	OMALIES:			
-	4.2 IS THIS A WARRANTY OR SERVICE CONTI	A CT IODS VES T NO I	T IEVES ORDER	OB CONTRACT #.	
	DECLARATION: I CERTIFY TO THE BEST OF		_ ′		
3.0		LINED IN DOCUMENT #9			
ī	NAME:		SIGNATURE DAT	E:	
8	SIGNATURE:				
j	JOB TITLE:		EST. SHIPPING DA	ATE:	
	COMPANY:				
1	PHONE/FAX #:		EST. DELIVERY D	DATE:	

Appendix 5, Information on Typical Hazardous Gases

The table lists typical gases used in semiconductor-processing tools. Personnel operating, maintaining and services of the process tools and pumps must understand fully the properties and hazards of the gases used in those devices.

Many of these process gases can react explosively with other chemicals or gases. Some are pyrophoric; they will ignite spontaneously if exposed to air. Mixing combustion gases and combustion support gases or exhausting them together can result in explosive reactions—causing serious damage and personnel injury.

This list neither encompass all explosive gases nor describes all risks and dangers that they may cause. While general safe practice is diluting gases to 25% of LEL, LFL or TLV, EBARA strongly advises contacting your process tool supplier and/or chemical supplier to obtain complete and current information on potential risks and hazards of the process gases and instructions on the safe operation of the tool. It is the user's responsibility to observe safe practices to avoid potential risks.

WARNING	The process tool suppiler and end user must avoid concurrent pumping of gases that may react in the pump. EBARA does not assume risks caused by hazardous chemical reactions resulting from simultaneous injection or mixture of multiple process gases in the pump. The pump has no protection features against the dangers from such usage.
	To avoid any hazard induced by toxicity, flammability and explosiveness of the process gases used in the tool, be sure to operate the tool according to the operations safety guidelines supplied by tool suppliers.
WARNING	The table below lists typical process gases used in a semiconductor- processing tool. However, details concerning the tool gases and other concerns specific to your tool should be directed to the respective tool suppliers.

APPENDIX 5 Typical Hazardous Gas Information

1. Etching process

Gas	Combustion Support	Flammable	Toxic	Corrosive	Global Warming	Allowable Level*
NF ₃	0		0	0		10ppm
HF			0	0		3ppm
Cl ₂	0		0	0		0.5ppm
BCI ₃			0	0		5ppm as HCl
HBr			0	0		3ppm
Br ₂			0	0		0.1ppm
CF ₄					0	N/A
CHF₃					0	N/A
C ₂ F ₆					0	N/A

^{*}Allowable level is specified as TLV of ACGIH.

2. LP-CVD

Gas	Combustion Support	Flammable	Toxic	Corrosive	Global Warming	Allowable Level
SiH ₂ Cl ₂		0	0	0		5ppm as HCl
SiH ₄		0	0			5ppm
Si ₂ H ₆		0	0			5ppm
Si(OC ₂ H ₅) ₄ (TEOS)		0				10ppm
As(OC ₂ H ₅) ₄ (TEOA)		0	0			0. 01mg/m 3 as As
NH ₃		0	0	0		25ppm
H ₂		0				4% LEL*
NF ₃	0		0	0		10ppm
CIF ₃	0		0	0		0.1ppm

*LEL : Lower Explosion Level

3. Ion-implant

Gas	Combustion	Flammable	Toxic	Corrosive	Global	Allowable	
	Support				Warming	Level	
P	\sH₃		0	0			0.05ppm
Е	B_2H_6		0	0			0.1ppm
I	PH ₃		0	0	0		0.3ppm
	BF ₃			0	0		1ppm

Appendix 6

Typical Leak Check Procedure

NOTE: This general procedure is not a substitute for user's work instructions or leak detector operations manual. Read and follow the instructions for your leak detection apparatus.

Perform leak check after initial system assembly and after any breach of the system for maintenance. Check pump down time (that is time to go from atmosphere to target pressure) of fore line to confirm the absence of gross leaks.

For vacuum systems and process pump exhaust lines, pressurize the system with helium and run the probe ("sniffer") of a mass spectrometer leak detector around all joints, seals and fittings.

Realign joints, tighten fittings, replace seals, etc.

Repeat as necessary to eliminate all leaks.

Disconnect helium supply and place system in operating condition.